


LLX LED

Surface mounted light fittings with LED T8 tubes

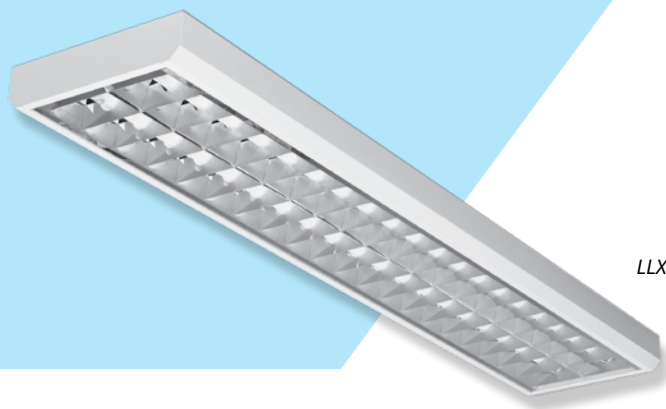

LLXL2LED1200AL

Body:

White painted (RAL 9003) metal sheet

Optic (&):

AL - parabolic louver of highly polished aluminium with mat aluminium cross blades

B - white parabolic louver

ALDP2 - double parabolic louver category C2 of highly polished aluminium

Wiring (#):

Luminaires are fitted for use with T8 LED lamps OSRAM Substitube advanced or PHILIPS MASTER LED LEDtube GA100. Standard T8 fluorescent lamps cannot be used into these luminaires.

Application:

These light fittings can be used as surface mounted or pendant. Suitable for applications with high frequency switching of lights, in systems controlled by motion sensors like corridors or stairs

Accessories:

Tube suspension

Cord suspension ZH22

Protection grid OM

Versions (@):



OK - double-circuit wiring

LPH - fittings with lamps PHILIPS MASTER LEDtube GA100

LOS - fittings with lamps OSRAM SubstitubeTUBE advanced fittings without lamps

Note:

Lamps are certified for use only with mentioned tubes. Use of other LED tubes is not approved and could lead to malfunctioning lights or damaging for which the manufacturer is not responsible.

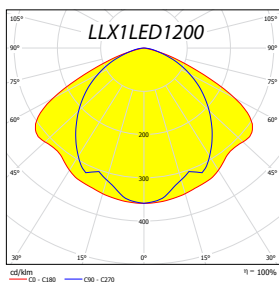

	W	A	B	X	Y
LLXL1LED600 &@	1x11	650	170	340	-
LLXL2LED600 &@	2x11	650	266	340	180
LLXL4LED600 &@	4x11	650	457	340	360
LLXL1LED1200 &@	1x22	1260	170	950	-
LLXL2LED1200 &@	2x22	1260	266	950	180
LLXL1LED1500 &@	1x25	1560	170	1250	-
LLXL2LED1500 &@	2x25	1560	266	1250	180

