



C ALDP

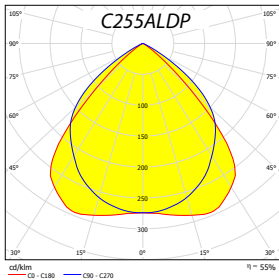

C255ALDP

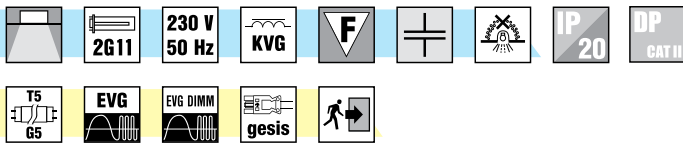

Recessed direct / indirect fittings

Body:

White painted (RAL 9003) metal sheet

Optic (&):

ALDP - double parabolic louvre category C2 of highly polished aluminium, white reflectors

MATDP - double parabolic louvre category C2 of mat aluminium, white reflectors
Perforated wings along the louvre

Wiring (#):

EP - high frequency ballast HFB (standard)
EPSA - HFB analogue dimmable (1-10 V)
EPSD - HFB digital dimmable TRIDONIC ECO
EPSDD - HFB digital dimmable DALI
MULTIWATT - universal HFB for T5 lamps

Application:

Recessed fitting for installation into false ceiling with visible supporting structure (600x600/625x625 modules). These fittings are recommended for offices, for lighting areas with high requirements for light and glare control.

Accessories:

Reduction frame for installing light fitting module 600 into false ceiling module 625.

Versions (@):

600 - for 600 module
625 - for 625 module
ISO - external connection board ISODOM
F - with flexible cord
NZ - emergency pack
EP2 - double-circuit wiring

For more info see pages 24-25.

Typ	⊗	W	Modul 600		Modul 625		kg
			A	B	A	B	
C140 &#@	TC-L	1x40	596	596	622	622	3,7
C240 &#@	TC-L	2x40	596	596	622	622	3,7
C155 &#@	TC-L	1x55	596	596	622	622	3,7
C255 &#@	TC-L	2x55	596	596	622	622	3,7
C214(24) &#@	T5	2x14	596	596	622	622	2,6
C414(24) &#@	T5	4x14(24)	596	596	622	622	3,7
C255/214(24) &#@	TC-L + T5	2x55 + 2x14(24)	596	596	622	622	6,5

