



Závěsná LED svítidla pro interiérové osvětlení

Pendant interior LED fittings

MARS LED

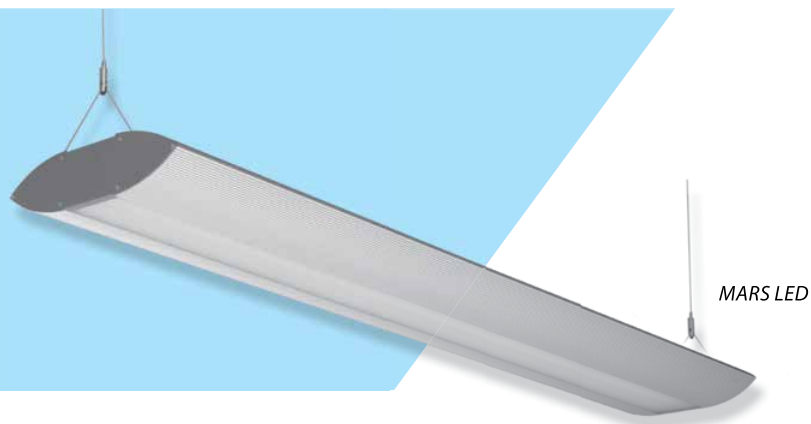

Body:

Eloxal aluminium profile, metal plate endcaps finished in RAL9007

Optic:

KO - semiopal cover ACRYL SATINE

LED:

Mid Power LED
3...warm white 3000K
4...cold white 4000K

Wiring:

LED driver (constant current)
ND – not dimmable (standard)
DIM – analogue dimmable 1-10V
DALI – digital dimmable DALI

Application:

Pendant light fittings for direct/indirect illumination.

These fittings are recommended for offices, for lighting areas with high requirements for light and glare control.

Note:

Fittings MARS LED can be produced in modification enabling bonding into straight row. In this case are luminaires delivered with connecting endcaps, with through wiring 5x 1,5 mm². The row can be compiled by START, CONT and END fittings:
MAR L/R START - contains start terminal board, 1 standard endcap, 1 connecting

Těleso:

Eloxovaný hliníkový profil, ocelová čela v RAL9007

Optický systém:

KO - opálový kryt ACRYL SATINE

LED:

Mid Power LED
3...teplá bílá 3000K
4...studená bílá 4000K

Výstroj:

LED proudový driver
ND – nestmívatelný (standard)
DIM – analogově stmívatelný 1-10V DC
DALI – digitalně stmívatelný DALI

Aplikace:

Závěsná svítidla pro přímé osvětlení interiérů
Pro kanceláře, společenské a výstavní prostory, ...

Další informace:

Svítidla je možno objednávat i v provedení pro spojování do řad. Tělesa jsou pak dodávána s propojovacími čely osazenými propojovacími čepy, osazena vodiči pro průběžnou 3 fázovou montáž (5x1,5 mm²). Sestavu řady je nutno vytvořit pomocí startovacích, průběžných a koncových svítidel:

MAR L / R START - obsahuje připojovací svorkovnici, 1 čelo koncové, 1 čelo propojovací, 2 závěsy

MAR L / R CONT - 2 propojovací čela, 2 propojovací svorkovnice na koncích svítidel, 1 závěs

MAR L / R END - 1 propojovací čelo, 1 koncové čelo, 1 propojovací svorkovnice, 1 závěs

Propojení svítidel se provádí kabelovým svazkem přiloženým ve svítidle jako příslušenství.

Závěsné sady ZH11 jsou vždy součástí balení svítidla.

endcap, with terminal board, 2 cord suspensions (without cable)

MAR L/R CONT - contains 2 connecting endcaps, 2 terminal boards, 1 cord suspension (without cable)

MAR L / R END - contains 1 connecting endcap with terminal board, 1 standard endcap, 1 cord suspension (without cable)

All components required for the connection and hanging are included.

Typ	&	W	lm	A	B	C	X	Y
MARL1SKO&V1/350	3 = 3000K 4 = 4000K	20	1700	605	225	67	585	0
MARL1MKO&V1/700		36	3000	1205			1185	0
MARL1MKO&V1/1050		56	4200	1505			1485	0
MARL1LKO&V1/1050		60	5100	1505			1485	0

lm - vyzářený světelný tok / luminaire light output

