

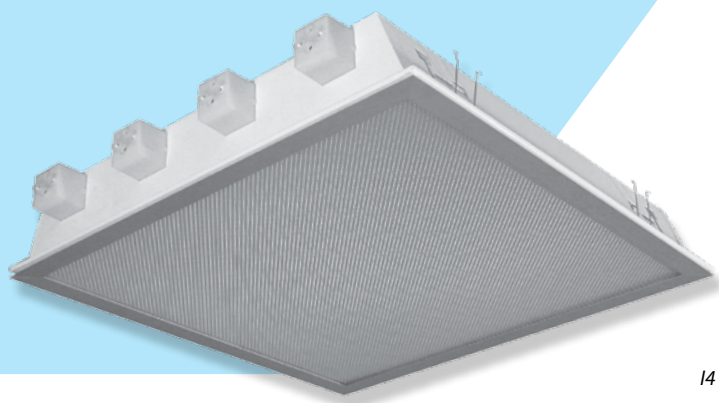
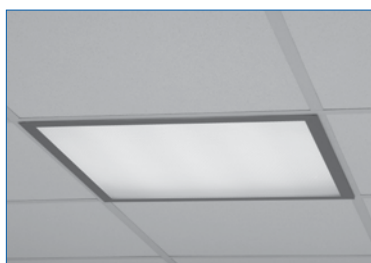


## Recessed fittings with cover, IP54

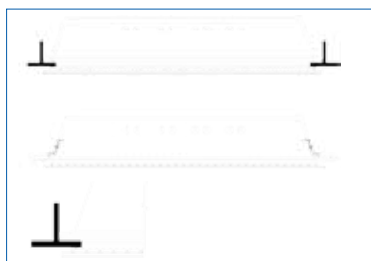

I418KP/IP54



I418KP/IP54

**Body:**

White painted (RAL 9003) metal sheet

**Optic:**

KO - opal cover, eloxal aluminium frame

KP - prismatic cover, eloxal aluminium frame

**Wiring (#):**

compensated, ballast cat. B (standard for T8 lamps fittings)

EP - high frequency ballast HFB (standard for T5 lamps fittings)

EPSA - HFB analogue dimmable (1-10 V)

EP5D - HFB digital dimmable TRIDONIC ECO

EP5DD - HFB digital dimmable DALI

**Application:**

Recessed light fitting for installation into false ceiling with visible supporting structure (600x600/625x625 modules) or gypsum plasterboard.

**Accessories:**

Fixing clips for installation into gypsum plasterboard – 54214.

**Versions (@):**

600 - for 600 module

625 - for 625 module

ISO - external connection board ISODOM

KIT - external connection board BJB

K - with WIELAND connector

F - with flexible cord

NZ - emergency pack

OK - double-circuit wiring

**Notes:**

Luminaire meets IP54 protection when installed on a ceiling, on a user side.

The upper part of the luminaire (hidden above the ceiling) has IP20 protection

For more info see pages 24-25.

Typ	W	Modul 600			Modul 625			C	kg
		A	B		A	B			
I318KO(P)#@/IP54	3x18	596	596	576x576	622	622	602x602	94	4,8
I418KO(P)#@/IP54	4x18	596	596	576x576	622	622	602x602	94	4,9
I236KO(P)#@/IP54	2x36	1196	296	1176x276	1246	310	1226x290	94	4,9
I314 (24) #@/IP54	3x14(24)	596	596	576x576	622	622	602x602	60	4,0
I414 (24) #@/IP54	4x14(24)	596	596	576x576	622	622	602x602	60	4,0
I228 (54) #@/IP54	2x28(54)	1196	296	1176x276	1246	310	1226x290	60	4,4

