

# IT5 A, B, C, D

## Recessed louvre fittings for T5 lamps



LUMINAIRE VERSION A

### Body:

White painted (RAL 9003) metal sheet

### Optic (&):

ALDP - double parabolic louvre category

C2 of highly polished aluminium

M4DP - double parabolic louvre

category C2 of highly polished

ALANOD MIRO aluminium

MATDP - double parabolic louvre

category C2 of mat aluminium

AL - parabolic louvre of high

polished aluminium with mat

aluminium cross blades

ALMAT - parabolic louvre of mat aluminium

B - white parabolic louvre

### Wiring (#):

EP - high frequency ballast HFB (standard)

EP5A - HFB analogue dimmable (1-10 V)

EP5D - HFB digital dimmable TRIDONIC ECO

EP5DD - HFB digital dimmable DALI

MULTIWATT - universal HFB for T5 lamps

### Application:

Recessed fitting for installation into false ceiling with visible supporting structure (600x600/625x625 modules) or gypsum plasterboard-type ceiling.

These fittings are recommended for offices, for lighting areas with high requirements for light and glare control.

### Accessories:

Fixing clips for installation into gypsum plasterboard – 54214.

Reduction frame for installing light fitting module 600 into false ceiling module 625.

### Versions (@):

600 - for 600 module

625 - for 625 module

ISO - external connection board ISODOM

KIT - external connection board JJB

K - with WIELAND connector


F - with flexible cor

NZ - emergency pack

EP2 - double-circuit wiring

Y - perforated cover

RAL9006 - luminaire finished in RAL9006

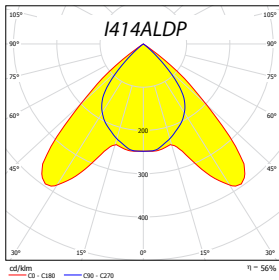


I414ALDPA



I414BA

Typ	W	Modul 600			Modul 625			kg
		A	B		A	B		
I114(24) &#@	1x14(24)	596	184	576x164	622	200	602x180	1,5
I214(24) &#@	2x14(24)	596	296	576x276	622	310	602x290	1,9
I314(24) &#@	3x14(24)	596	596	576x576	622	622	602x602	3,7
I414(24) &#@	4x14(24)	596	596	576x576	622	622	602x602	3,7
I128(54) &#@	1x28(54)	1196	184	1176x164	1246	200	1226x180	2,6
I228(54) &#@	2x28(54)	1196	296	1176x276	1246	310	1226x290	3,7
I328(54) &#@	3x28(54)	1196	596	1176x576	1246	622	1226x602	6,5
I428(54) &#@	4x28(54)	1196	596	1176x576	1246	622	1226x602	6,5
I135(49,80) &#@	1x35(49,80)	1496	184	1476x164	1546	200	1526x180	3,5
I235(49,80) &#@	2x35(49,80)	1496	296	1476x276	1546	310	1526x290	4,5
I335(49,80) &#@	3x35(49,80)	1496	596	1476x576	1546	622	1526x602	8,5
I435(49,80) &#@	4x35(49,80)	1496	596	1476x576	1546	622	1526x602	8,5

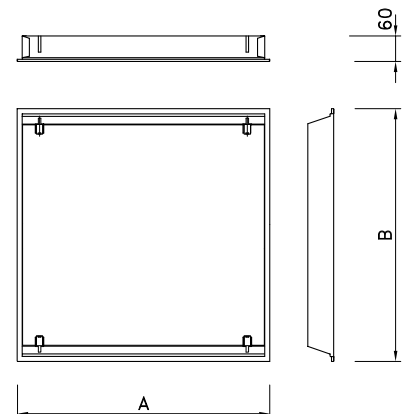


## Luminaires design available:



**Luminaire version B**



**Luminaire version C**

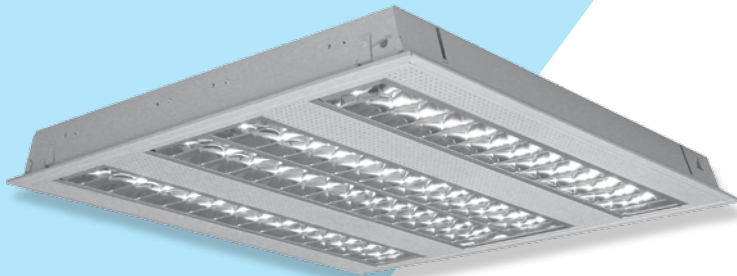

**Luminaire version D**



## Available versions of IT5 luminaires:

		T5 14W, 24W				T5 28W, 54W				T5 35W, 49W, 80W			
		1x	2x	3x	4x	1x	2x	3x	4x	1x	2x	3x	4x
ALDP MATDP M4DP	A	+	+	+	+	+	+	+	+	+	+	+	+
	B	-	-	-	+	-	-	-	+	-	-	-	-
	C	-	+	+	+	-	+	+	+	-	+	+	+
	D	-	-	-	+	-	-	-	+	-	-	-	-
AL B ALMAT	A	+	+	+	+	+	+	+	+	+	+	+	+
	B	-	-	-	+	-	-	-	+	-	-	-	-
	C	-	+	+	+	-	+	+	+	-	-	-	-
	D	-	-	-	+	-	-	-	+	-	-	-	-