

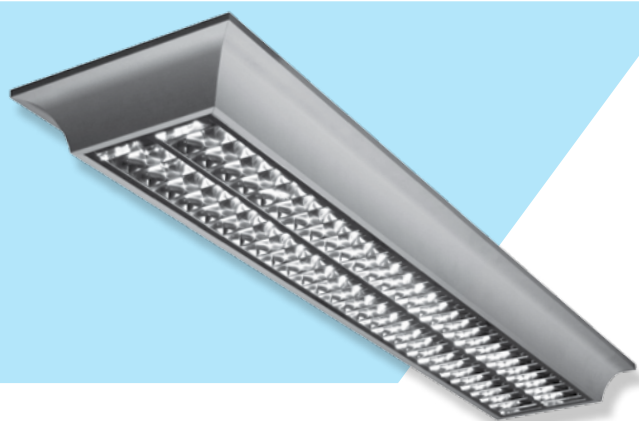


Pendant / surface interior fittings



ERA228ALDP

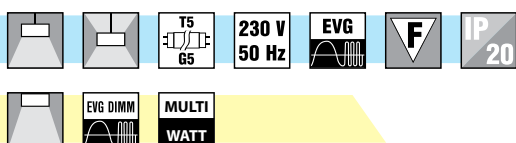

ERA228KO



ERA128ALDP



ERA228ALDP - UPPER SIDE

Body:

Eloxal aluminium profile

Optic:

ALDP double parabolic louvre category
C2 of highly polished aluminium
KO - semiopal cover ACRYL SATINE

Wiring (#):

EP - high frequency ballast HFB (standard)
EPSA - HFB analogue dimmable (1-10 V)
EPSD - HFB digital dimmable TRIDONIC ECO
EPSDD - HFB digital dimmable DALI
MULTIWATT - universal HFB for T5 lamps

Application:

Pendant light fittings for direct / indirect illumination (ERAD luminaires are also usable for surface installing).
For offices, common and exhibition spaces, etc.

Versions:

ERA - pendant fittings for direct / indirect illumination, upper side is made of prismatic PMMA cover. Suspension set ZH11 included.
ERAD - pendant or surface installed fittings for direct illumination only (closed upper side of the fittings)

	W	A	B	C	X	Y	R	kg
ERA128 (54) #ALDP	1x28 (54)	1305	225	75	1020	70	1050	3,5
ERA135 (49,80) #ALDP	1x35 (49,80)	1605	225	75	1320	70	1350	4,5
ERA228 (54) #ALDP	2x28 (54)	1305	310	75	1020	160	1050	5,0
ERA235 (49,80) #ALDP	2x35 (49,80)	1605	310	75	1320	160	1350	7,0
ERA228 (54) #KO	2x28 (54)	1305	310	95	1050	220	1050	5,0
ERA235 (49,80) #KO	2x35 (49,80)	1605	310	95	1350	220	1350	7,0

