

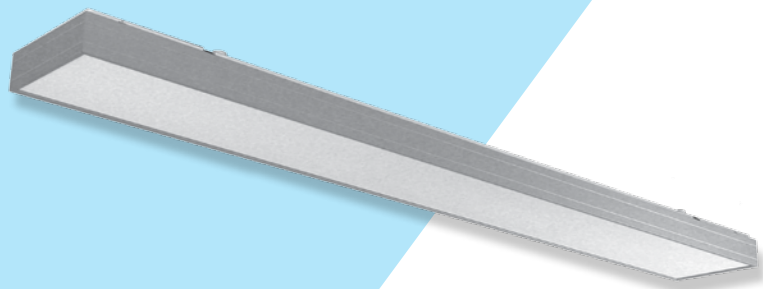


EXA KO

Pendant / surface interior fittings



EXA228KO

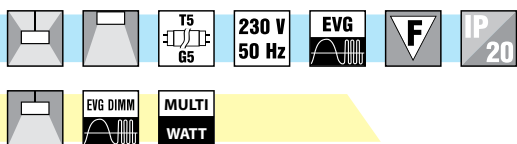

EXA414KO



EXA228 - UPPER SIDE



Body:

Eloxal aluminium profile

Optic:

KO - semiopal cover ACRYL SATINE

Wiring (#):

EP - high frequency ballast HFB (standard)

EPSA - HFB analogue dimmable (1-10 V)

EPSD - HFB digital dimmable TRIDONIC ECO

EPSDD - HFB digital dimmable DALI

MULTIWATT - universal HFB for T5 lamps

Application:

Pendant luminaires for direct-indirect lighting of interiors (some variants of the fixture can be installed as a surface mounted).

For offices, common and exhibition spaces, etc.

Versions:

EXA - pendant fittings for direct / indirect illumination - suspension set included

(ZH11 set for 2-lamps luminaires,

ZH22 set for 4-lamps luminaires)

EXAD - pendant or surface installed fittings for direct illumination only (closed upper side of the fittings)

	W	A	B	X	Y	R	S	kg
EXA214 (24)KO	2x14 (54)	603	160	450	120	520	120	2,2
EXA414 (24)KO	4x14 (24)	603	603	450	520	520	520	3,7
EXA228 (54)KO	2x28 (54)	1200	160	1120	120	1050	120	3,3
EXA235 (49,80)KO	2x35 (49,80)	1500	160	1420	120	1350	120	5,0

