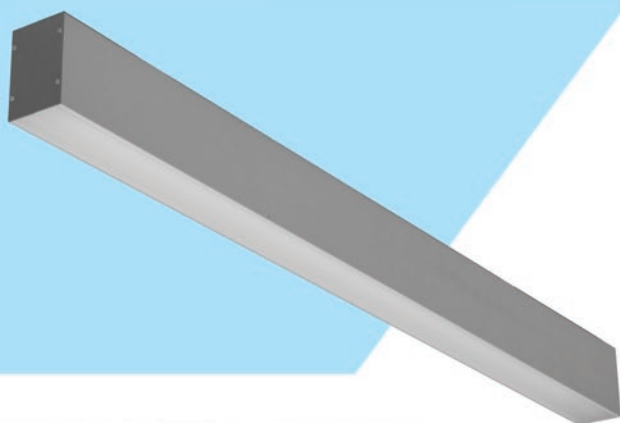


H HL

LED light fittings

**Body:**

Eloxal aluminium profile

Optic:

KO - opal cover

Lighting source:

LED OSRAM DURIS or T5 lamp

Wiring @:



EP - high frequency ballast HFB (standart)
EPSA - HFB analogue dimmable
EPSD - HFB digital dimmable TRIDONIC ECO
EPSDD - HFB digital dimmable DALI
MULTIWATT - universal HFB for T5 lamps
ND - LED driver non-dimmable
DIM1-10 - LED driver dimmable 1-10V
DALI - LED driver digital dimmable DALI

Application:

Single aluminium fitting for direct illumination.
Possible installation to the row (version /R) with continuous assembly.
Should be installed is pendant (pendant set included) or recessed (model HV).
Reception, Restaurant - Bar, illumination of high representative work place

Versions:

H - for T5 lamps
HL - with LED Osram Duris E5
/R - version for installation to the row (continuous assembly)

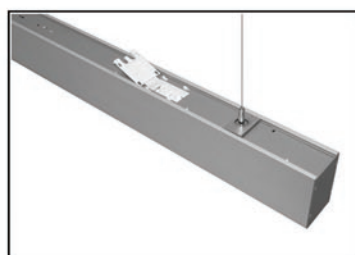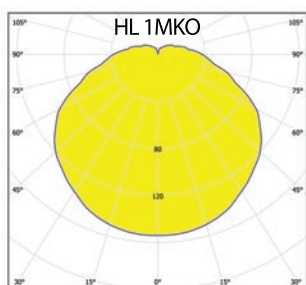

suspension set, rapid connector ISODOM



	W	A	B	C	lm	K
H128(54)KO@	1x28 (54)	1185	66	100	-	-
H135(49,80)KO@	1x35 (49,80)	1485	66	100	-	-
HV128(54)KO@	1x28 (54)	1185	66	100	-	-
HV135(49,80)KO@	1x35 (49,80)	1485	66	100	-	-
HL1MKO3V1/700@	37	1185	66	100	3900	3000
HL1MKO4V1/700@	37	1185	66	100	3900	4000
HL1LKO3V1/1400@	60	1485	66	100	6000	3000
HL1LKO4V1/1400@	60	1485	66	100	6000	4000

MODUS
CZECH MANUFACTURER OF LIGHTING FITTINGS

K - color temperature (Kelvin), lm - luminaire light output

More information at our website www.moduslighting.eu. Due our continuing program of product development data can be changed without notice.