


KL

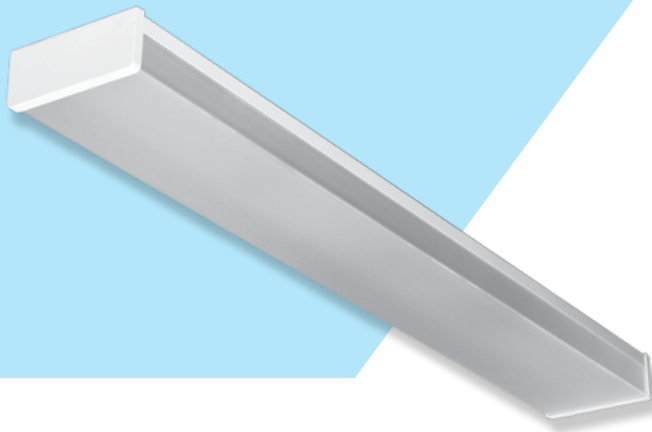

KL236

Light fittings with cover

Body:

White painted (RAL 9003) metal sheet
White plastic endcaps

Optic (&):

KL - prismatic PMMA cover
KLO - opal PMMA cover

Wiring (#):

N - uncompensated, ballast cat. B
K - compensated, ballast cat. B
EP - high frequency ballast HFB
EPSA - HFB analogue dimmable (1-10 V)
EPSD - HFB digital dimmable TRIDONIC ECO
EPSDD - HFB digital dimmable DALI
MULTIWATT - universal HFB for T5 lamps

Application:

These light fittings can be used as surface mounted or suspended.

Accessories:


Tube suspension
Cord suspension ZH22
Protection grid OM

Versions (@):

NZ - emergency pack

Note:

Surface mounted style of installation is recommended. When light fittings are suspended, they should be hung by 4 cords or tubes.

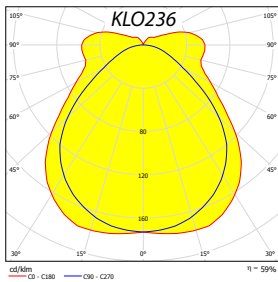

T8	W	A	X	Y	kg
KL218#@	2x18	634	400	100	2,0
KL236#@	2x36	1234	900	100	3,6
KL258#@	2x58	1534	1000	100	5,2
KLO218#@	2x18	634	400	100	2,0
KLO236#@	2x36	1234	900	100	3,6
KLO258#@	2x58	1534	1000	100	5,2

T5	W	A	X	Y	kg
KL214(24)#@	2x14(24)	634	400	100	1,6
KL228(54)#@	2x28(54)	1234	800	100	3,0
KL235(49,80)#@	2x35(49,80)	1534	1000	100	4,5
KLO214(24)#@	2x14(24)	634	400	100	1,6
KLO228(54)#@	2x28(54)	1234	800	100	3,0
KLO235(49,80)#@	2x35(49,80)	1534	1000	100	4,5

