



Light fittings with cover



KMO236

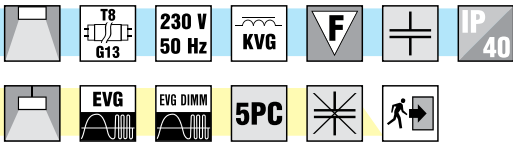

KMC136

Body:

White painted (RAL 9003) metal sheet
White plastic endcaps

Optic (&):

C - prismatic PMMA cover
O - opal PMMA cover

Wiring (#):

N - uncompensated, ballast cat. B
K - compensated, ballast cat. B
EP - high frequency ballast HFB
EPSA - HFB analogue dimmable (1-10 V)
EPSD - HFB digital dimmable TRIDONIC ECO
EPSDD - HFB digital dimmable DALI

Application:

These light fittings can be used as surface mounted or suspended.

Accessories:

Tube suspension ZH22
Cord suspension ZH22
Protection grid OM

Versions (@):

NZ - emergency pack

Note:

Surface mounted style of installation is recommended. When light fittings are suspended, they should be hung by 4 cords or tubes.

	W	A	B	C	X	Y	R	S	kg
KM&118#	1x18	625	110	75	500	0	550	0	1,6
KM&218#	2x18	625	180	65	500	100	540	0	2,0
KM&136#	1x36	1250	110	75	900	0	850	0	2,4
KM&236#	2x36	1250	180	65	900	100	900	0	3,8
KM&336#	3x36	1250	300	80	900	200	950	200	4,4
KM&258#	2x58	1555	200	65	1200	100	1200	0	5,1

