


MARS KO

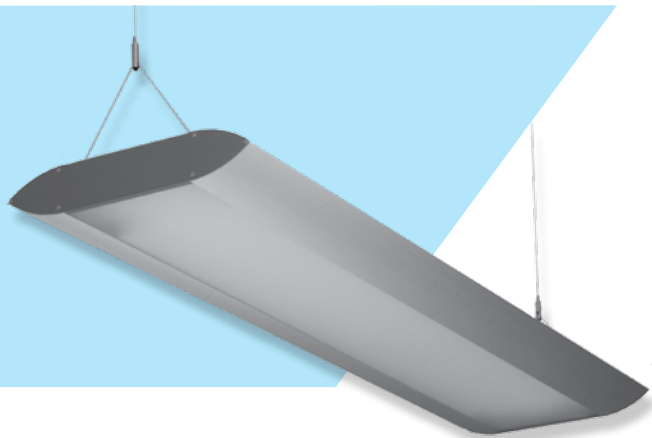

MARS228KO

Pendant interior fittings

Body:

Eloxal aluminium profile, metal plate
endcaps finished in RAL9007

Optic (&):

KO - semiopal cover ACRYL SATINE

Wiring (#):

EP - high frequency ballast HFB (standard)
EPSA - HFB analogue dimmable (1-10 V)
EPSD - HFB digital dimmable TRIDONIC ECO
EPSDD - HFB digital dimmable DALI
MULTIWATT - universal HFB for T5 lamps



Application:

Pendant light fittings for direct/indirect illumination.

These fittings are recommended for offices, for lighting areas with high requirements for light and glare control.

Note:

Cord suspension set ZH11 included in the fitting.



MAR228KO - UPPER SIDE

	W	A	B	R	kg
MAR114 (24) #KO	1x14 (24)	604	270	550	3,5
MAR214 (24) #KO	2x14 (28)	604	355	550	4,0
MAR128 (54) #KO	1x28 (54)	1204	270	1150	5,5
MAR228 (54) #KO	2x28 (54)	1204	355	1150	6,0
MAR135 (49,80) #KO	1x35 (49,80)	1504	270	1450	7,5
MAR235 (49,80) #KO	2x35 (49,80)	1504	355	1450	8,0

