



EQUIPMENT FOR ATEX

APPARECCHI A LED LED LIGHTING FIXTURES

EVL 50



GAS	II2G Ex d IIC T5 ÷ T4	Gb	IP66	Zone 1 - Zone 21 - Zone 2 - Zone 22
DUST	II2D Ex tb IIIC T95°C ÷ T130°C	Db	IP66	❄️ -20°C ÷ ☀️ +40°C ❄️ -20°C ÷ ☀️ +60°C

Materiale : corpo : lega leggera
trasparente : vetro temperato
portalampane E27 : ceramico

Installazione : con staffa in acciaio inox AISI 304

Viteria : Acciaio inox AISI 304

Guarnizioni : +40°C EPDM , +60°C Silicone

Collegamento : al portalampane o morsetto 2x 2,5mm²

Ingresso : N° 1 ø3/4"

Peso : 2,5 kg

Material : body : light alloy
transparent : tempered glass
E27 lamp holder : ceramic

Installation : with stainless steel AISI 304 bracket



Hardware : Stainless steel AISI 304

Gaskets : +40°C EPDM , +60°C Silicon

Connection : to lampholder or terminals 2x2,5mm²

Cable entry : N° 1 ø3/4"

Weight : 2,5 kg



Potenza : max LED 30W

Tensione : 230V a richiesta altre tensioni

Frequenza : 50Hz + 60Hz

Power : max LED 30W

Voltage : 230V other voltages on request




Frequency : 50Hz + 60Hz



EQUIPMENT FOR ATEX

SEMAFORO A LED LED TRAFFIC LIGHT




TLD

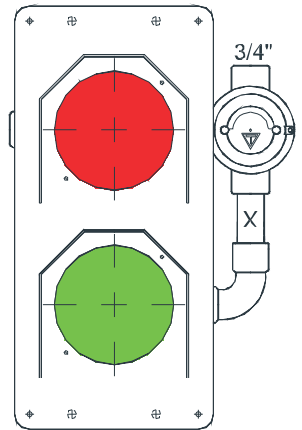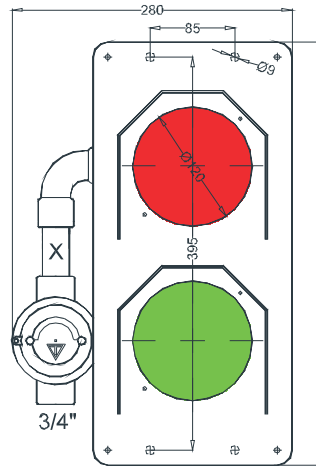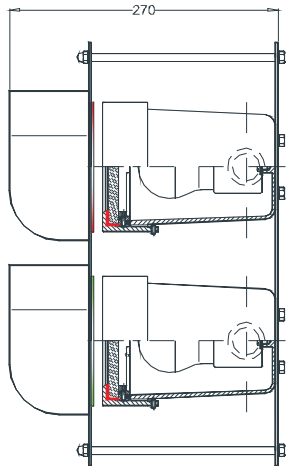

EQUIPMENT FOR ATEX

SEMAFORO A LED LED TRAFFIC LIGHT

TLT

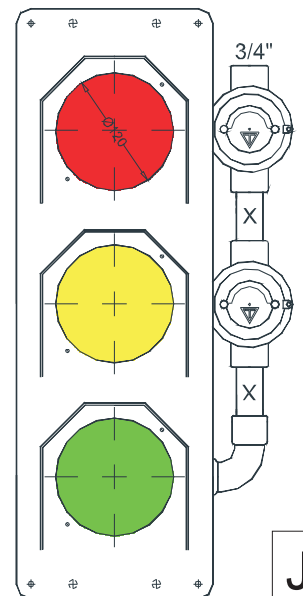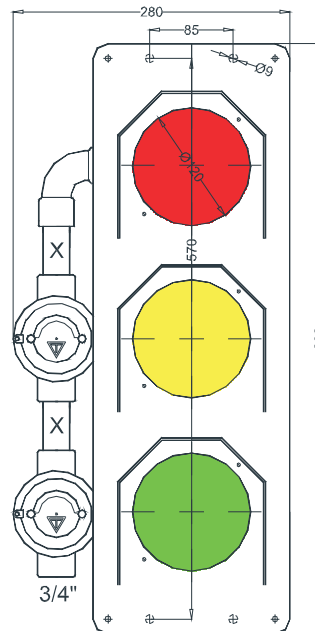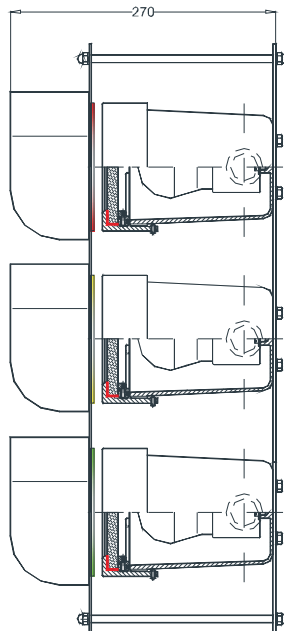

J4