




PRIMUS LED



PRIMUS LED/3 h

- IP20 protection rating
- The unit enclosure is made of high quality V0 class PC polycarbonate.
- Power supply voltage: 230 V 50 Hz
- Functions: A – non-maintained version or SA – maintained version
- Ni-Cd HT batteries with the autonomy time: 2 h or 3 h
Charging: 24 h
- Installation: screw fixed within a lighting fitting or externally
- For illuminating evacuation routes and exits in public utility buildings
- Designed for installation in lighting fittings equipped with LED light sources
- Adapted to operate with LED tubes powered by external direct current power units and directly from the 230VAC grid

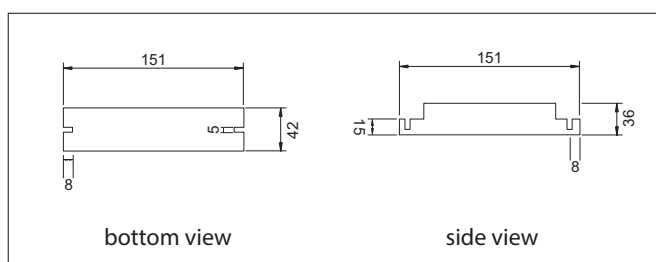

Model	Time	Function	Battery	Weight
PRIMUS LED/1 h 12 VDC	1 h	A / SA	3,6 V/1,5 Ah	0,35
PRIMUS LED/2 h 12 VDC	2 h	A / SA	3,6 V/2,5 Ah	0,42
PRIMUS LED/3 h 12 VDC	3 h	A / SA	3,6 V/4,0 Ah	0,55
PRIMUS LED/1 h 24 VDC	1 h	A / SA	3,6 V/1,5 Ah	0,35
PRIMUS LED/2 h 24 VDC	2 h	A / SA	3,6 V/2,5 Ah	0,42
PRIMUS LED/3 h 24 VDC	3 h	A / SA	3,6 V/4,0 Ah	0,55
PRIMUS LED/1 h 48 VDC	1 h	A / SA	3,6 V/1,5 Ah	0,35
PRIMUS LED/2 h 48 VDC	2 h	A / SA	3,6 V/2,5 Ah	0,42
PRIMUS LED/3 h 48 VDC	3 h	A / SA	3,6 V/4,0 Ah	0,55
PRIMUS LED/1 h 60 VDC	1 h	A / SA	3,6 V/1,5 Ah	0,35
PRIMUS LED/2 h 60 VDC	2 h	A / SA	3,6 V/2,5 Ah	0,42
PRIMUS LED/3 h 60 VDC	3 h	A / SA	3,6 V/4,0 Ah	0,55
PRIMUS LED/1 h 230 VAC	1 h	A / SA	3,6 V/1,5 Ah	0,35
PRIMUS LED/2 h 230 VAC	2 h	A / SA	3,6 V/2,5 Ah	0,42
PRIMUS LED/3 h 230 VAC	3 h	A / SA	3,6 V/4,0 Ah	0,55