


PRIMUS TEC



PRIMUS TEC 6–36 W 2 h

- IP20 protection rating
- The unit enclosure is made of high quality V0 class PC polycarbonate.
- Power supply voltage: 230 V 50 Hz
- Supported lighting fittings: equipped with 4-pin, 6–58 W light tubes
- Supported ballasts: KVG and EVG
- Functions: A – non-maintained version or SA – maintained version
- Ni-Cd HT batteries with the autonomy time: 2 h or 3 h
- Charging: 24 h
- Version with manual test available on request
- Installation: screw fixed within lighting fitting or externally
- For illuminating evacuation routes and exits in public utility buildings
- In preparation: autotest

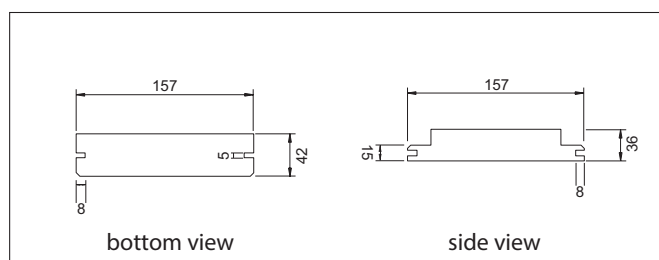

Model	Catalogue number *	Function	Autonomy	Multi-pack dimensions (cm)	Weight with battery pack (kg)	Multi-pack
PRIMUS TEC 6–36 W SA/A 1 h	39940	SA/A	1 h	47,5x27x35	0,35	40 units
PRIMUS TEC 6–36 W SA/A 2 h	39941	SA/A	2 h	47,5x27x35	0,42	40 units
PRIMUS TEC 6–36 W SA/A 3 h	39942	SA/A	3 h	47,5x27x35	0,55	40 units
PRIMUS TEC 6–58 W SA/A 1 h	39943	SA/A	1 h	47,5x27x35	0,35	40 units
PRIMUS TEC 6–58 W SA/A 2 h	39944	SA/A	2 h	47,5x27x35	0,42	40 units
PRIMUS TEC 6–58 W SA/A 3 h	39945	SA/A	3 h	47,5x27x35	0,55	40 units

* The catalogue number contains a kit: an emergency unit and a battery pack

APPLICATIONS

Model	T8 / G13	TC-SEL / 2G7	TC-L / 2G11	TC-DEL / G24q	T5 / G5	TC-2D / GR10q	TC-TEL / GX24q
PRIMUS TEC 6–36 W	18/36 W	5/7/9/11 W	18/24/36 W	10/13/18/26 W	6/8/13/14/21 W	16 W	18/26 W
PRIMUS TEC 6–58 W	18/36/58 W	5/7/9/11 W	18/24/36 W	10/13/18/26 W	6/8/13/14/21/24/28 W	16/28/38 W	18/26/32/42 W