


Emergency luminaires

TIGER

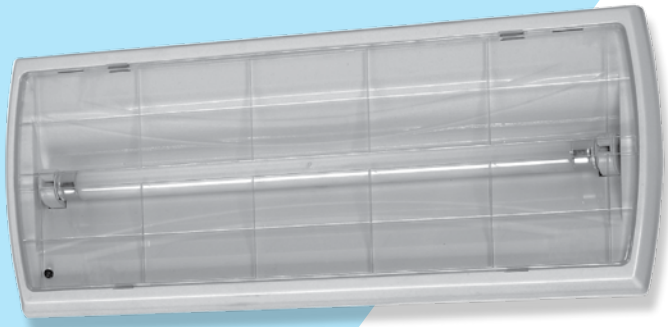

TIGER

Body:

White polycarbonate body

Optic:

TIGER - clear polycarbonate cover

TIGER LED - opal polycarbonate cover

Application:

Surface mounted / recessed luminaire for emergency lighting of escape ways
For illumination of emergency signs

Accessories:

Pictograms PIK (recommended size S)
OZAWPRICH - clip for recessed mounting (cut out 120x325 mm), 2 pcs/luminaire

Operation mode (#):


SE - non-maintained
SA - maintained
S - network luminaire

Versions(@):

AT - autotest
PT - manual test button
RS - RUBIC monitoring system
CB - luminaire for central battery system

Note:

Luminaires are delivered without pictograms, they have to be ordered separately.
Recognition distance 20 m.



LED



TIGER LED



OZAWPRICH

	IP		W	⊖	lm
TIGER	IP22	TG1#@	1x8 T5	1	130
		TG3#@	1x8 T5	3	110
TIGER LED	IP22	TGL1#@	LED 25cd, 1,2W	1	
		TGL3#@	LED 25cd, 1,2W	3	

