

# PUNTO


- **Certified Fitting**
- IP20 Protection rating
- Aluminium profile, pictograms made of PMMA, rear part of enclosure made of steel (for PUNTO WALL)
- Power supply voltage: 230 V 50 Hz
- Sources of light: LED diodes
- Functions: A – non-maintained version or SA – maintained version
- Ni-Cd HT batteries with the autonomy time: 2 h  
Charging: 24 h
- Manual test
- Suspended or wall installation (for PUNTO WALL)
- For illuminating evacuation directions and designating evacuation exits in public utility buildings
- Visibility: 26 m



**PUNTO (DOUBLE and WALL)**



**PUNTO WALL (rear view)**

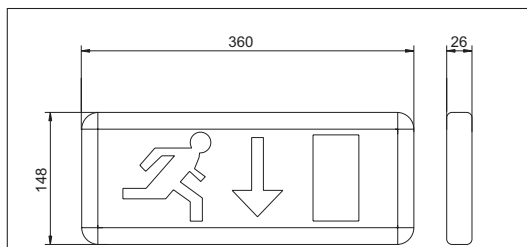

Pictograms in the kit for:  
PUNTO DOUBLE



PUNTO WALL



Optionally available pictograms



Model	Catalogue number	Source of light	Function	Autonomy	Weight (kg)	Multi-pack dimensions (cm)	Multi-pack
PUNTO WALL SA/A 2 h	40920	LED	SA/A*	2 h	0,43	43x39,5x38	20 units
PUNTO DOUBLE SA/A 2 h	40921	LED	SA/A*	2 h	0,43	43x39,5x38	20 units

\* Function is selected by setting the switch to a proper position

## ACCESSORIES

- OPTIONALLY AVAILABLE PICTOGRAMS

Model	Catalogue Number	Dimensions	Packaging
Pictogram (the PPMA board): EVACUATION EXIT for PUNTO	40637	330x130	1 unit
Pictogram: STAIRS DOWN TO THE RIGHT	99951	300x100	1 unit
Pictogram: STAIRS DOWN TO THE LEFT	99952	300x100	1 unit
Pictogram: STAIRS UP TO THE RIGHT	99953	300x100	1 unit
Pictogram: STAIRS UP TO THE LEFT	99954	300x100	1 unit