



STARLET LED SPOT LIGHTS



FLUSH-MOUNTED VERSION FOR CORRIDORS AND OPEN ZONES

- **Certified Fitting**
- IP20 Protection rating
- Enclosure made of aluminium
- Power supply voltage: 230 V 50 Hz
- Sources of light: 1 W, 3 W or 5 W LED diodes
- Functions: A – non-maintained version or SA – maintained version
- Versions without a battery pack are also available as spot lights
- Ni-Cd HT batteries with the min. autonomy time of 3 h
Charging: 24 h
- Installation: in suspended ceilings or flush-mounted
- For illuminating evacuation routes and exits in public utility buildings
- Versions without a battery pack also for standard lighting
- Typical places: corridors, staircases, small rooms






STARLET 1 W



STARLET 3 W



STARLET 5 W

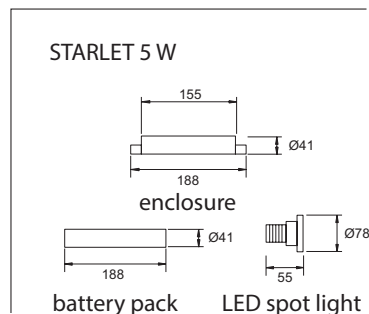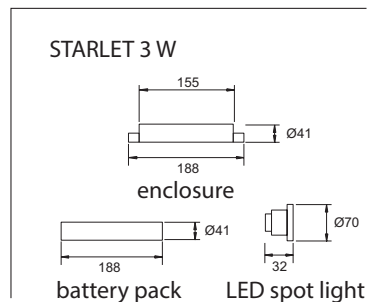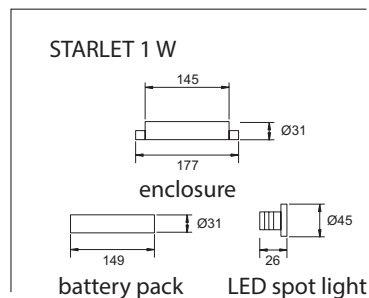

Model	Catalogue number	Source of light	Function	Autonomy	Weight (kg)	Multi-pack
STARLET 1 W SA/A 3 h	41646	LED 1 W	SA/A*	3 h	0,24	40 units
STARLET 3 W SA/A 3 h	41647	LED 3 W	SA/A*	3 h	0,56	20 units
STARLET 5 W SA/A 3 h	41648	LED 5 W	SA/A*	3 h	0,62	12 units
STARLET 1 W A 3 h	40097	LED 1 W	A**	3 h	0,24	40 units
STARLET 3 W A 3 h	40098	LED 3 W	A**	3 h	0,56	20 units
STARLET 5 W A 3 h	40099	LED 5 W	A**	3 h	0,62	12 units

* Availability of wiring as A- non-maintained version or SA – maintained version
** A version only