

2.1

PYROS LED









+ **Brida**
Clamp
Collier





+ **Tapón EEx d**
Plug EEx d
Bouchon EEx d



+ **Prensaestopa EEx d**
Cablegland EEx d
Presse-étoupe EEx d



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

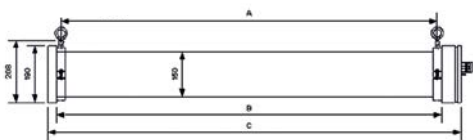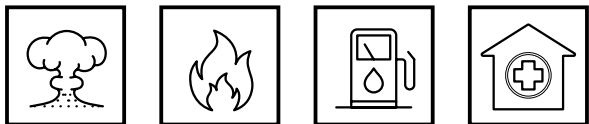

IT - DE



RG1

MACADAM

3/4

UGR
<19

CR>80

L70B50
>
50.000


IP66
IK10

CE
EN 60598-1

94/9/CE



II2GD
Ex d 2B+H2 T6 Gb
Ex tb IIIC T85°C Db

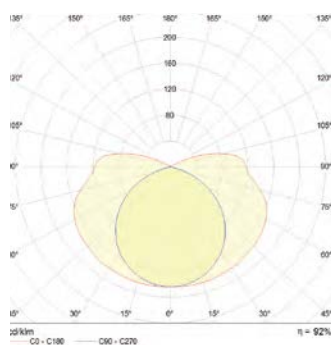

Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Tª color Tª colour Tª couleur	Largo Length Longueur	Ancho Wide Large	Ancho con brida Width with clamp Largeur avec fixations	Embalaje Packaging Emballage
		(W)	(Lm)	(°K)	(mm)	(mm)	(mm)	
PY113	600	14	2150	4000	748	150	208	1
PY123	600	28	4300	4000	748	150	208	1
PY213	1200	28	4300	4000	1357	150	208	1
PY223	1200	55	8600	4000	1357	150	208	1
PY313	1500	35	5370	4000	1659	150	208	1
PY323	1500	70	10740	4000	1659	150	208	1