ЮНИА-Т ЕООД
www.juniabg.com, e-mail: sales@juniabg.com
2050 Ихтиман, България, тел. +359 886090968


# TUBI A LED
# *LED TUBE*


# LTC


| | | | | |
|---|---|---|---|---|
| GAS | II2G Ex emb IIC T5 ÷ T4 Gb | IP66 | Zone 1 - Zone 21 - Zone 2 - Zone 22 | |
| DUST | II2D Ex mb IIIC T95°C ÷ T130°C Db | IP66 | ❄-20°C ÷ ☼+40°C | ❄-20°C ÷ ☼+60°C |

| | |
|---|---|
| Materiale : | Tubo in policarbonato V0<br>Testate in poliammide PA66 |
| Installazione : | con piedi di fissaggio in acciaio inox |
| Cavo :<br>Pressacavo : | H07RN-F 2x1mm² lunghezza 5m<br>Poliammide |
| Sorgente led : | modulo a 72 led by OSRAM |
| Sorgente luminosa : | Modulo 72 led |
| Durata : | > 50.000 ore |
| *Material :* | *Policarbonate tube V0*<br>*Polyammide Pa66* |
| *Installation :* | *with stainless steel lugs* |
| *Cable :*<br>*Pressacavo :* | *H07RN-F 2x1mm² lenght 5m*<br>*Polyammide* |
| *Led source :* | *Module 72 led by OSRAM* |
| *Lifetime :* | *> 50.000 hours* |






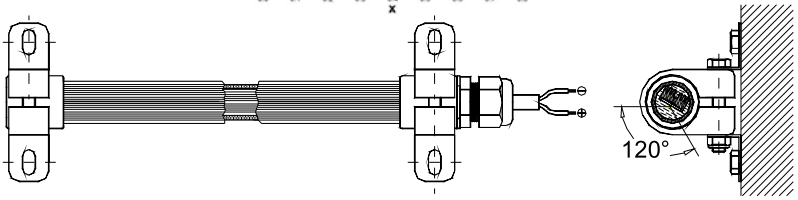
| Codice *Code* | Potenza [W] *Power [W]* | L | X | Fusso [lm] *Flux [lm]* | Colore *Color* | Temp. colore [k] *Color temp. [k]* | Angolo irragg. Radiance angle | Tensione [V] *Voltage [V]* | Peso *Weight* [kg] |
|---|---|---|---|---|---|---|---|---|---|
| **LTC 10** | 9 | 341 | 320 | 800 | Daylight | 5500 | 120° | 24Vdc | 1,200 |
| **LTC 20** | 17 | 628 | 607 | 1600 | Daylight | 5500 | 120° | 24Vdc | 2,100 |
| **LTC 30** | 26 | 915 | 894 | 2400 | Daylight | 5500 | 120° | 24Vdc | 3,000 |
| **LTC 35** | 35 | 1202 | 1181 | 3200 | Daylight | 5500 | 120° | 24Vdc | 4,200 |

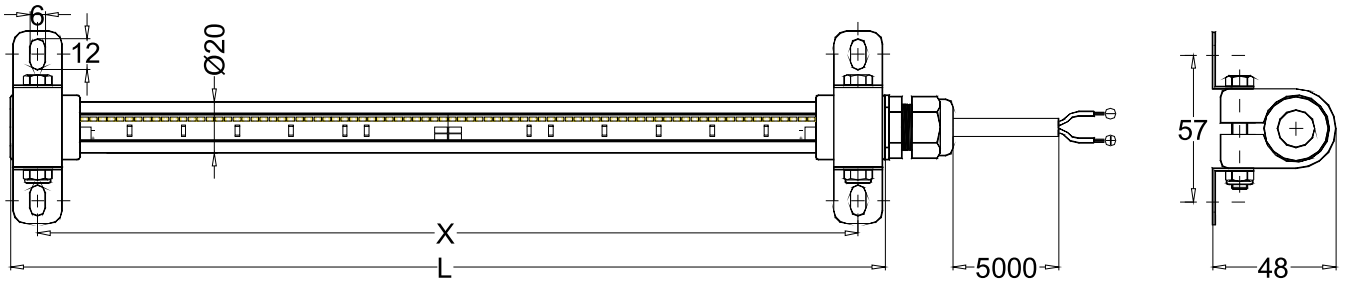


**Codice : LTC 10 EXIT**
***Code***

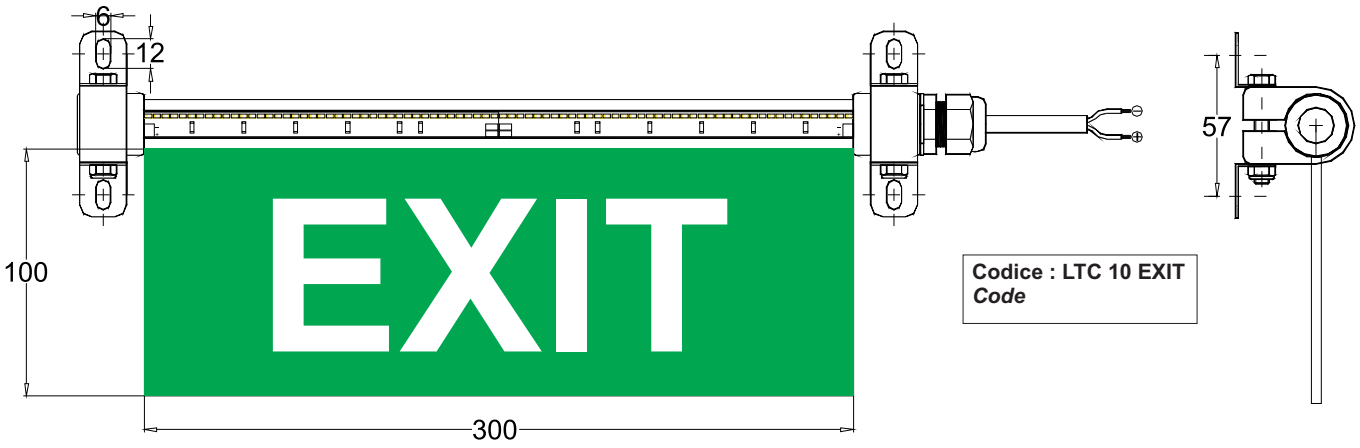
ЮНИА-Т ЕООД
www.juniabg.com, e-mail: sales@juniabg.com
2050 Ихтиман, България, тел. +359 886090968

# TUBI A LED PORTATILE
# *PORTABLE LED TUBE*
# LTC ..P

| | | | | |
|---|---|---|---|---|
| GAS | II2G Ex emb IIC T5 ÷ T4 Gb | IP66 | Zone 1 - Zone 21 - Zone 2 - Zone 22 | |
| DUST | II2D Ex mb IIIC T95°C ÷ T130°C Db | IP66 | ❄-20°C ÷ ☼+40°C | ❄-20°C ÷ ☼+60°C |

| | |
|---|---|
| Materiale : | Tubo in policarbonato V0<br>Testate in poliammide PA66 |
| Installazione : | portatile con gancio in acciaio inox |
| Cavo :<br>Pressacavo : | H07RN-F 2x1mm² lunghezza 5m<br>Poliammide |
| Sorgente led : | modulo a 72 led by OSRAM |
| Sorgente luminosa : | Modulo 72 led |
| Durata : | > 50.000 ore |
| *Material :* | *Policarbonate tube V0*<br>*Polyammide Pa66* |
| *Installation :* | *portable with stainless steel hook* |
| *Cable :*<br>*Pressacavo :* | *H07RN-F 2x1mm² lenght 5m*<br>*Polyammide* |
| *Led source :* | *Module 72 led by OSRAM* |
| *Lifetime :* | *> 50.000 hours* |

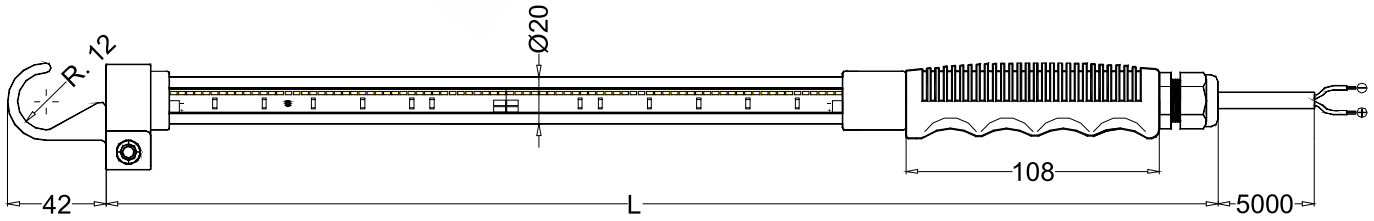


| Codice *Code* | Potenza [W] *Power [W]* | L | Fusso [lm] *Flux [lm]* | Colore *Color* | Temp. colore [k] *Color temp. [k]* | Angolo irragg. Radiance angle | Tensione [V] *Voltage [V]* | Peso *Weight* [kg] |
|---|---|---|---|---|---|---|---|---|
| **LTC 10P** | 9 | 475 | 800 | Daylight | 5500 | 120° | 24Vdc | 1,400 |
| **LTC 20P** | 17 | 680 | 1600 | Daylight | 5500 | 120° | 24Vdc | 2,300 |

