ЮНИА-Т ЕООД
www.juniabg.com, e-mail: sales@juniabg.com
2050 Ихтиман, България, тел. +359 886090968

LANUS ROUND

NEW



... aluminium, dustproof, waterproof round light fitting

USE

The fitting is suitable for indoor industrial spaces, warehouses, sports halls and advertisement spaces.

ADVANTAGES


- Light fitting protection **IP66**
- Ambient temperature from **-40°C** to **45°C**
- Lifetime: 50 000 hours / L80B10
- High **mechanical resistance IK10**
- Body: aluminium alloy, graphite black (RAL 9001)
- Optical cover: clear PMMA with integrated optics
- Constant luminous flux even in ambient temperature of -40 °C
- Standard model CRI > 80: 4000 K
- At request CRI > 80: 3000 K, 5000 K, 6500 K, CRI > 90: 3000 K, 4000 K, 5000 K, 6500 K
- Connection: a 0.4m 3-core 3x1mm2 CYSY cable
- Insulation: class I


LANUS ROUND




TECHNICAL DESCRIPTION

- Light fitting protection **IP66**
- Ambient temperature from **-40°C** to **45°C**
- Maximum system efficacy: **155** lm/W
- Lifetime: 50 000 hours / L80B10
- Body: aluminium alloy, graphite black (RAL 9001)
- Reflector cover made of clear PMMA with integrated optics
- Standard model CRI > 80: 4000 K
- Connection: a 0.4m 3-core 3x1mm2 CYSY cable
- Mounting: supplied with an eye bolt
- Electric equipment: LED modules, 1-10V dimmable driver controlled by 2-core 2x0,5mm2 cable
- Beam angle: 60° or 90°
- The values stated for power consumption an luminous flux are in a tolerance of ± 7.5 %

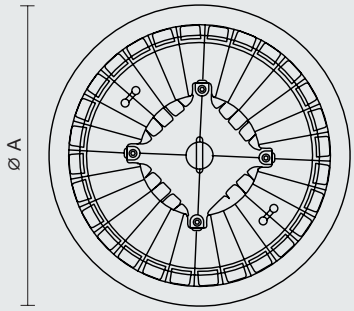


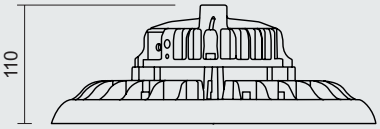

LANUS ROUND A60



LANUS ROUND A90



Code	Type	Luminous flux of LED modules [lm]	Luminous flux of light fitting [lm]	Power consumption [W]	System efficacy [lm/W]	UGR Longitudinal/ transverse	Net weight [kg]	A [mm]
	For ambient temperature t_a = 45 °C							
106901	LANUS ROUND S 15000/840 A60	15590	14340	94,8	151	26.5 / 26.5	2,1	300
106903	LANUS ROUND S 15000/840 A90	15590	14650	94,8	155	28.3 / 28.3	2,1	300
106902	LANUS ROUND M 25000/840 A60	24480	22520	148,5	152	27.0 / 27.0	2,6	345
106904	LANUS ROUND M 25000/840 A90	24480	23010	148,5	155	28.8 / 28.8	2,6	345

LIGHT FITTING ATTACHMENT

An eye bolt is supplied with the fitting.



LIGHT FITTING DETAILED VIEW

LANUS ROUND



