

FLY



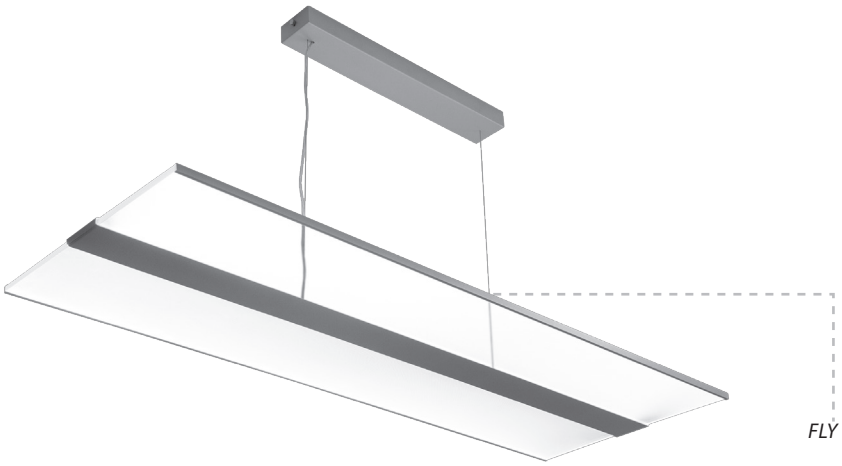

FLY



FLY

Pendant direct/indirect LED fittings

Body:
Metal gear box finnished in grey color (optionaly in white or black)


Optic:
Translucent acrylic layer

Version (body shape):
FLY...RM - pendant rectangle 1227x435 mm
FLY...S - surface rectangle 638x435 mm

Note:
Cord suspension set incl. transparent power supply cable (2 m length) is standardly included in a packing

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	○	×	×
ON OFF	1-10V	DALI				INT	EXT	
●	×	○	○	○	○	×	×	×

● default ○ optional × not possible

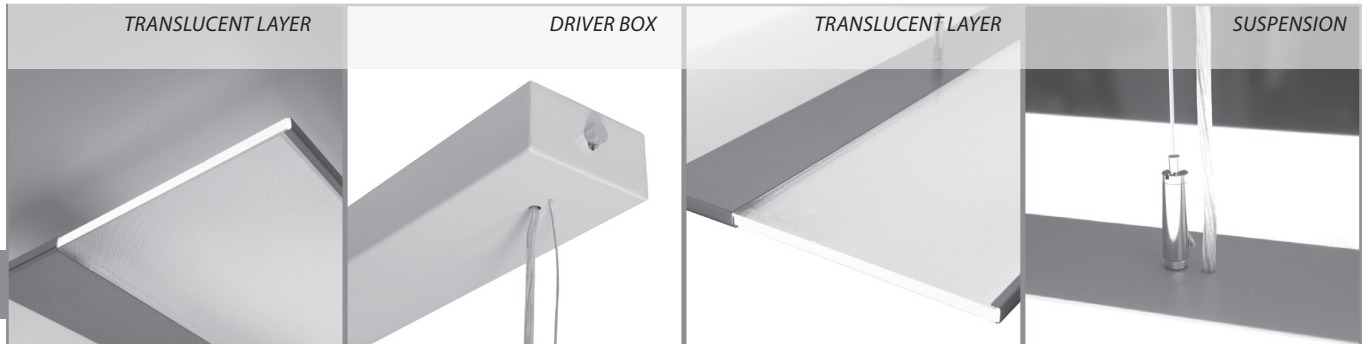


Codes: FLY4000RM3GP/ND


FLY	4000	R	M	3	G	S	/ND
Luminaire type FLY - pendant FLYS - surface	Light output	Body shape: R – rectangle S – square	Body lenght: S = 600 mm M = 1240 mm	Color temperature: 3 = 3000K 4 = 4000K 5 = 5700K	Color W = white B = black G = grey	Driver box assembly: S = surfaced/wall assembly V = recesse	Driver type: ND – no dimmable DALI – dimmable DALI



FLYS

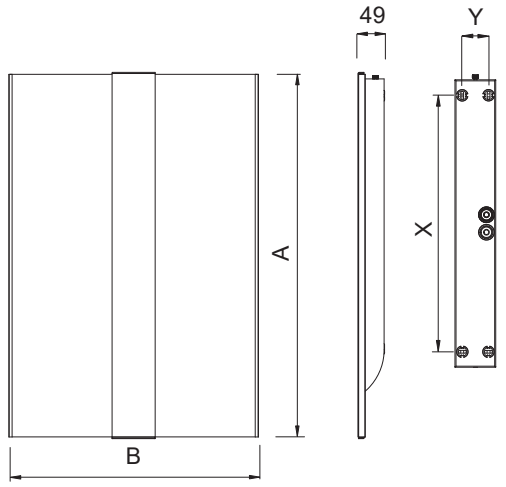

FLYS

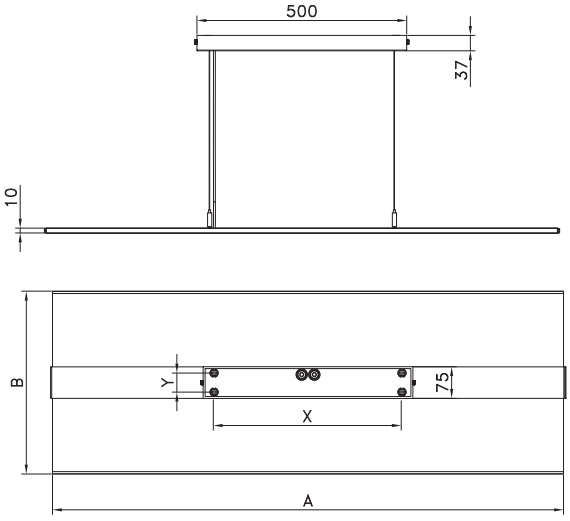

FLY

	W	lm	A	B	X	Y	kg
FLYS3000RS	26	3 500	638	435	224	23	4,5
FLY5000RM	44	5 500	1227		445	45	7
FLY7000RM	63	7 700					
FLY9000RM	77	9 000					
FLY5000RM/MIX	49	5 600					

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.