
CD


LED | 220 V 240 V 50-60 Hz | SDCM 3 | EN 62 471 RG 0 | CRI 80 | IP 20

80 000 L80B50

η_{ef} (lm/W) 128–136



CD DI M

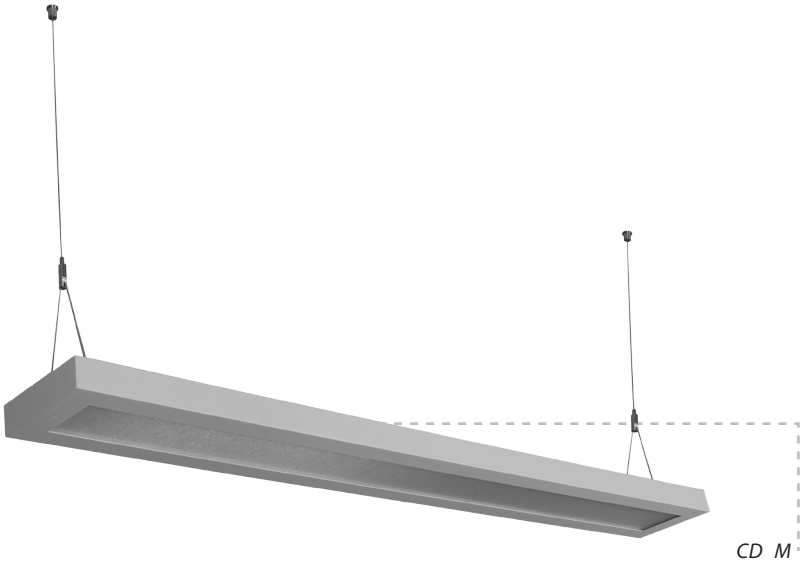

CD M

Pendant LED fittings
Body:
White or black painted metal sheet (another RAL colours available).

Optic:
KN - prismatic PS cover
KO - opal PS cover

Application:
Linear fittings for pendant installation (pendant set included).

Variants:
CD - single pendant luminaire, direct light distribution
CD... /DI - single pendant luminaire, direct/indirect light distribution
CD... /P - pendant luminaire for installation to straight row

Note:
Cord suspension set included in a packing.

Accessories:
CDSPOJ/B - connection part, white


2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	×	×	×	×	●
ON OFF	1-10V	DALI				INT	EXT	
●	×	○	○	○	○	×	×	×

● default ○ optional × not possible


SUSPENSION



INDIRECT LIGHT UNIT

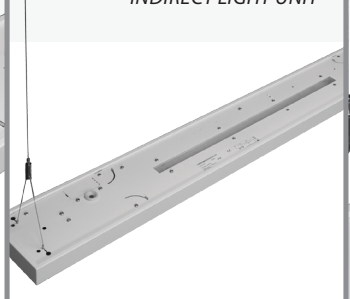

CABLE ENTRY

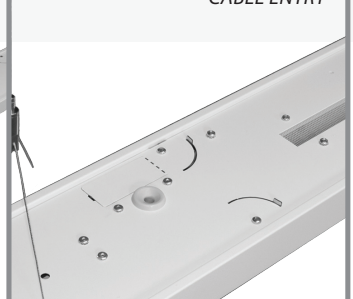


CONNECTION PART



Codes: CD4000MKN4/DI/C/ND/P

CD	4000	M	KN	4	/DI	/C	/ND	/P
Luminaire type	Light output (lm)	Body lenght M	Optic: KO - opal PS cover KN - prizmatic PS cover	Color temperature: 2 = 2700 K 3 = 3000 K 4 = 4000 K	Version: DI = direct-indirect	Color: - = white C = black S = silver RAL9006	Driver type: ND – no dimmable DALI – dimmable DALI	P = to line assembly

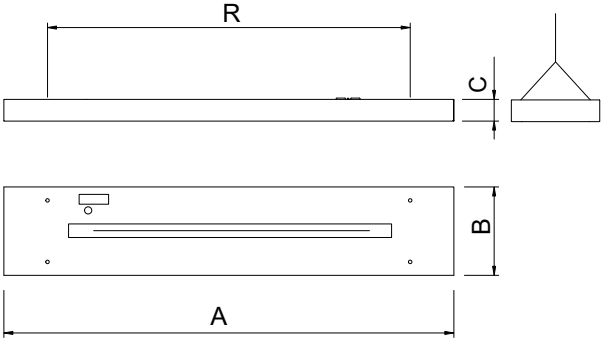

CD	W	lm		A	B	C	R	kg
		KO	KN					
CD4000M	31	4 000	4 200	1280	154	40	1200	4
CD6000M	47	6 000	6 300					
CD4000M DI	31	4 000	4 200					
CD6000M DI	47	6 000	6 300					

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.