

EPS

LED | 220 V 240 V 50-60 Hz | SDCM 3 | DIMM | IP 20 | EN 62 471 RG 0 | UGR <16 | 100 000 L70B50


η_{ef} (lm/W) 114-157

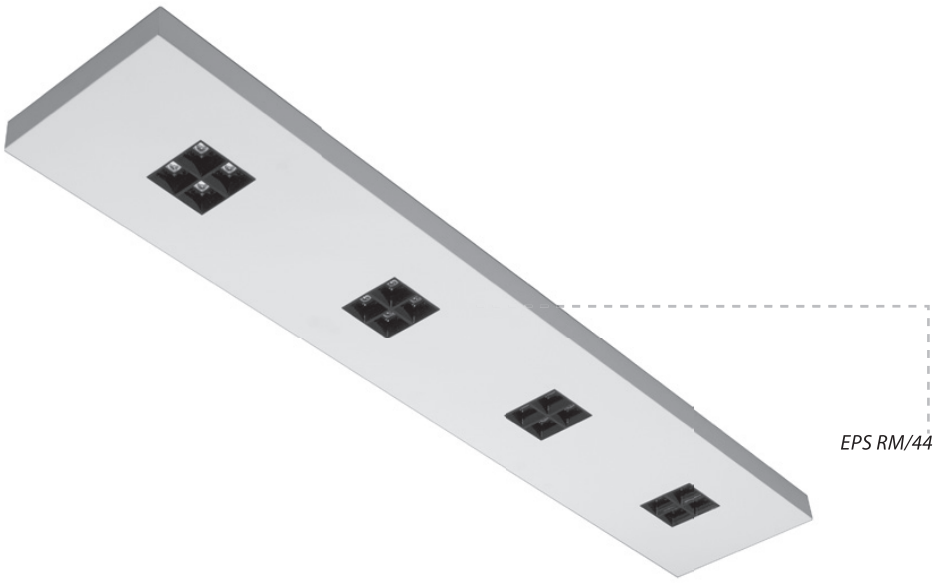

EPS RM/44



EPS B50



EPS B80

LED light fittings

Body:
White (black) coated metal sheet

Optic:
PC reflector + clear PMMA lenses
PC reflector + clear PMMA lenses
B - white reflector - bright
B M - white reflector - mat
C - black reflector - bright
C M - black reflector - mat
50 - narrow beam 50°
80 - wide beam 80°


Version (body shape)
EPS….SS/44 - square 595x595mm, 4 LED moduels
EPS…RM/1 = rectangle 1230x225mm, 1 linear LED module
EPS…RM/44 - rectangle 1230x225mm, 4 LED moduels
EPS…RL/64 - rectangle 1535x225mm, 6 LED moduels

Application:
Surface installation using magnetic holders (part of the package)
Pendant installation using suspension set (extra accessories)
ZH/UNI2 - fittings EPS RM or RL
ZH/UNI4 - fittings EPS SS

Accessories:
ZH/UNI2 - universal 2-wires suspension
ZH/UNI4 - universal 4-wires suspension

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	○	○	●	○	○	○	✕	●
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	○	○	✕	○


● default ○ optional ✕ not possible

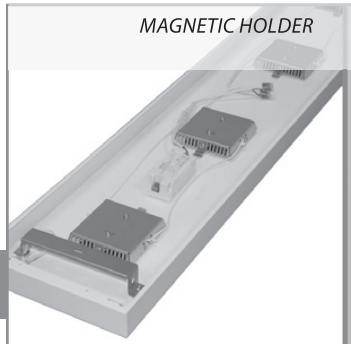


MAGNETIC HOLDER



OPTIC EPS

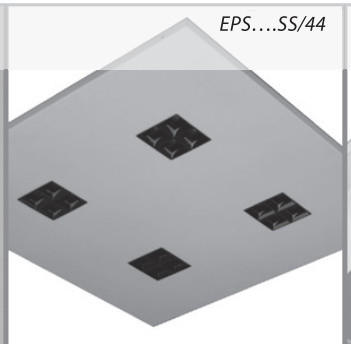


EPS….SS/44

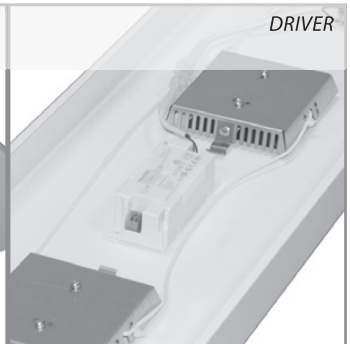


DRIVER

Codes: EPS4000RM3BB80/44/ND

EPS	4000	RM	3	B	B80	/44	/ND
Luminaire type	Light output (lm)	Body shape: SS - square - 595x595 mm RM - rectangle - 1230x225 mm RL - rectangle - 1535x225 mm	Color temperature: 2 = 2700 K 3 = 3000 K 4 = 4000 K 5 = 5700 K 6 = 6500 K	Body color: B - white body C - black body	Optic: B - white reflector B M - white reflector - mat C - black louvre C M - black reflector - mat 50 - narrow beam 50° 80 - wide beam 80°	Arrangement of LED modules	Driver type: ND - non-dimmable DALI - dimmable DALI

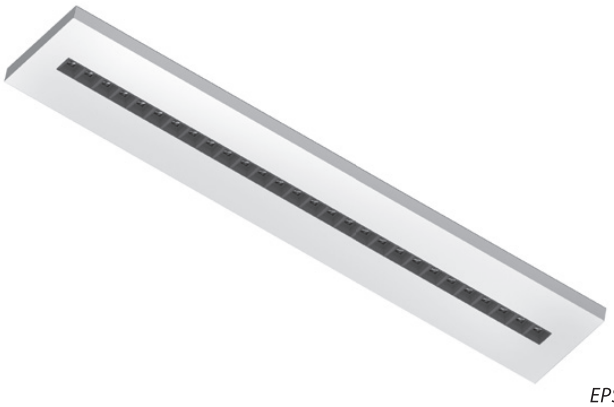

EPS RM/1

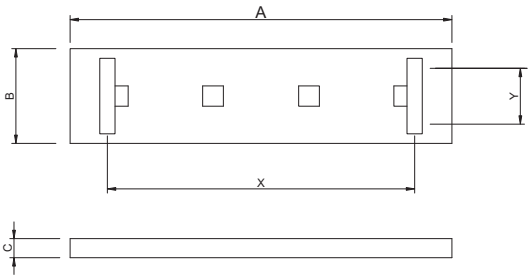

EPS .../1	W	lm		A	B	C	X	Y	R	kg
		B50, B80	C50, C80							
EPS3000RM .../1	23	2 900	2 600	1 230	225	40	1 140	-	1 205	2,0
EPS4000RM... /1	28	4 400	4 000							
EPS6000RM... /1	42	6 200	5 000							

EPS .../44	W	lm		A	B	C	X	Y	R	kg
		B50, B80	C50, C80							
EPS3000SS... /44	18	2 750	2 500	595	595	40	540	500	575	1,8
EPS4000SS... /44	27	3 900	3 500							
EPS3000RM... /44	18	2 750	2 500	1 230	225		1 140	-	1 205	2,0
EPS4000RM... /44	27	3 900	3 500							
EPS6000RL... /64	44	6 400	5 800	1 535	225		1 445	-	1 515	2,4

lm - luminaire light output R - distance of hanging points

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.