
OC

LED | 220 V 240 V 50-60 Hz | IP 65 | IK 08 | CRI 70 | EN 62 471 RG 0 | 100 000 L70B50


η_{ef} (lm/W) 122-130



OC S



OC R



OC S150

LED luminaires for public lighting

Body:
black (RAL9005) powder-coated aluminum body
Optionally in gray

Optical system:
polycarbonate lenses
R – optics for roads
S150 - symmetrical optics 150°

LED:
High power LED 5050

Application:
The luminaire is primarily intended for lighting sidewalks and cycle paths.
Mounting on a flange for bracket or flange for post with a diameter of 60 mm

Variants:
OC S – short body with one optic
OC M – long body with two optics

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	×	×	×	×	○
ON OFF	1-10V	DALI				INT	EXT	
●	×	×	×	×	×	×	×	○


● default ○ optional × not possible




OPTIC

Codes: OC2500S2RC/NDV60

OC	2500	S	2	R	C	/ND	V60
Luminaire type	Light output	Body S - short body with one optic M – long body with two optics	Color temperature 2 = 2700K, 3 = 3000 K 4 = 4000K	Optic R – optics for roads S150 - symmetrical optics 150°	Body color C - black S - grey	Driver type ND – fix output	Bracket V60 – flange for bracket 60 mm S60 – flange for post

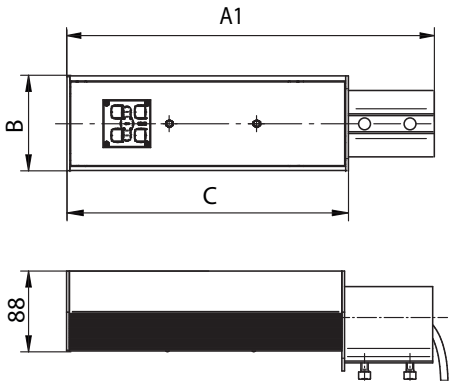

OC V60

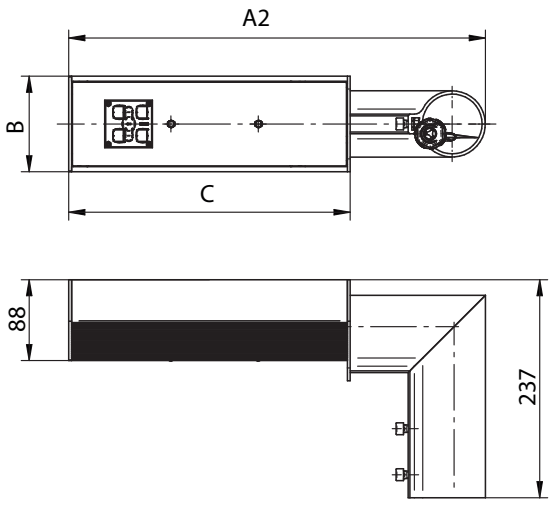

OC S60

	W	lm	A1	A2	B	C	kg
OC1000S	9	1 100	400	450	104	88	2,8
OC2500S	19	2 400					
OC5000M	37	4 800	450	500			3

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.