
# TS SOLO

LED | 220-240 V 50-60 Hz | SDCM 3 | DIMM | IP 20 | EN 62 471 RG 0 | 100 000 L70B50

$\eta_{ef}$ (lm/W) 125-159



TS



TS CW


## Anodized aluminium profie

**Body:**
Anodized aluminium profile

**Optic:**
Linear plastic optics
CN - narrow 60°
CW - wide 90°
CHR - high rack 35°
CRA - retail asymetric
KO - opal cover
KN - prizmatic cover

**Application:**
- pendant or surface installation of single fittings
- suspension set included

**Variants:**
TS - fittings for pendant installation - suspension set included
TSP - fittings for surface installation - without suspension set

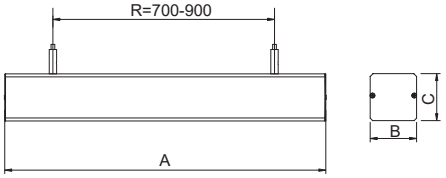


| 2200 | 2700 | 3000 | 4000 | 5700 | 6500 | MIX | RGB | |
|---|---|---|---|---|---|---|---|---|
| ✕ | ○ | ○ | ● | ○ | ○ | ✕ | ✕ | ● |
| ON OFF | 1-10V | DALI | | | | INT | EXT | |
| ● | ✕ | ○ | ○ | ✕ | ○ | ○ | ✕ | ✕ |

● default ○ optional ✕ not possible

| TS | W | lm | | | | | | A | B | C | R | kg |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | CW | CN | CHR | CRA | KN | KO | | | | | |
| TS2000S | 16 | 2 100 | 2 000 | 1 900 | 1 800 | 2 000 | 1 900 | 576 | 53 | 55 | 300-400 | 1,3 |
| TS3000XM | 21 | 3 100 | 3 000 | 2 900 | 2 800 | 2 800 | 2 700 | 858 | | | 450-650 | 2,0 |
| TS4000M | 30 | 4 200 | 3 900 | 3 800 | 3 600 | 3 700 | 3 500 | 1 140 | | | 600-800 | 2,2 |
| TS4000L | 22 | 3 500 | 3 200 | 3 100 | 2 900 | 2 900 | 2 800 | 1 422 | | | 700-900 | 2,5 |
| TS6000L | 39 | 5 600 | 5 200 | 5 000 | 4 700 | 4 900 | 4 600 | | | | | |
| TS8000L | 57 | 7 700 | 7 200 | 7 000 | 6 500 | 6 700 | 6 300 | | | | | |

| TSP | W | lm | | | | | | A | B | C | X | kg |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | CW | CN | CHR | CRA | KN | KO | | | | | |
| TSP2000S | 16 | 2 100 | 2 000 | 1 900 | 1 800 | 2 000 | 1 900 | 576 | 53 | 60 | 520 | 1,2 |
| TSP3000XM | 21 | 3 100 | 3 000 | 2 900 | 2 800 | 2 800 | 2 700 | 858 | | | 650 | 1,9 |
| TSP4000M | 30 | 4 200 | 3 900 | 3 800 | 3 600 | 3 700 | 3 500 | 1 140 | | | 900 | 2,1 |
| TSP4000L | 22 | 3 500 | 3 200 | 3 100 | 2 900 | 2 900 | 2 800 | 1 422 | | | 1 200 | 2,4 |
| TSP6000L | 39 | 5 600 | 5 200 | 5 000 | 4 700 | 4 900 | 4 600 | | | | | |
| TSP8000L | 57 | 7 700 | 7 200 | 7 000 | 6 500 | 6 700 | 6 300 | | | | | |

lm - luminaire light output