

RH




RH200



RH N



RH W



RH AS

LED floodlights

Body:
Powder painted non-corressive high-pressure die-cast aluminium

Optic:
Symetric glare-free optic lens
N - narrow beam 30°
W - wide be am 90°
AS - asymmetric optics


Application:
Floodlight for both indoor and outdoor application

2200	2700	3000	4000	5000	6500	MIX	RGB	
×	×	○	●	○	○	×	×	●
ON OFF	1-10V	DALI				INT	EXT	
●	×	○	×	×	×	×	×	●

● default ○ optional × not possible




RH 100

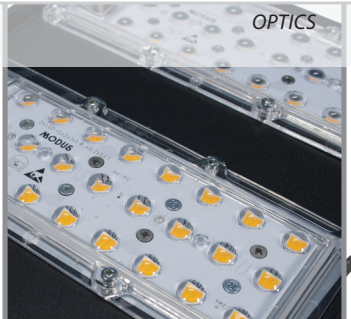

OPTICS




CONNECTOR



Codes: RH100W4/ND

RH	100	W	4	/ND
Luminaire type	Light output (x100 lm)	Optic W - Clear optic 90° wide beam N - Clear optic 30° narrow beam	Color temperature 3 = 3000K 4 = 4000K 5 = 5000K	Driver type: ND – Non dimmable DALI – dimmable DALI

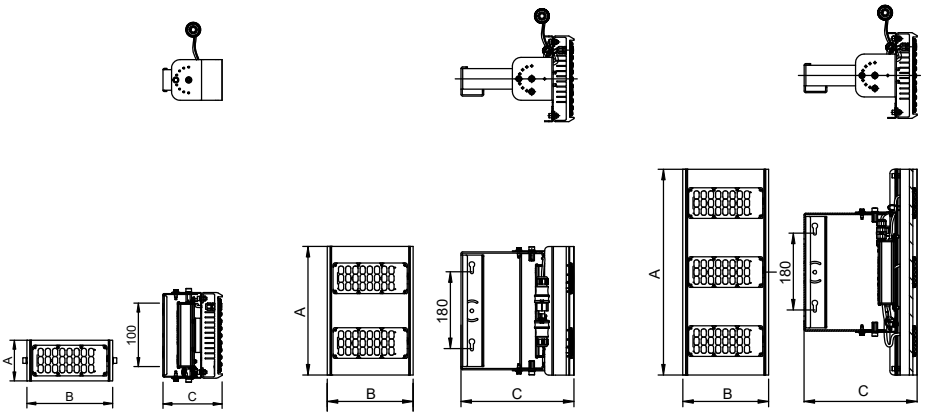

RH 50, 100 RH 200 RH 300

RH	W	lm			A	B	C	kg
		W	N	AS				
RH 100	75	10 100	9 800	10 000	95	200	138	2
RH 200	155	21 500	20 800	21 500	300		260	4,1
RH 300	224	31 800	30 800	31 500	480			7

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.