
TN

LED | 220 V 240 V 50-60 Hz | SDCM 3 | DIMM | IP 20 | EN 62 471 RG 0 | 100 000 L70B50


η_{ef} (lm/W) 141-161




TN S



TN W90



TN N60



TN DA25

Narrow LED linear fittings

Body:
White coated (RAL 9003) metal sheet

Optic:
W90 - wide beam 90°
N60 - narrow beam 60°
DA25 - double asymetric 25°

Application:
Surface or pendant installation

Accessories:
ZH/UNI4 - universal 4-wires suspension (one set for 2 luminaires)

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	○	×	×	●
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	×	×	×	×	○

● default ○ optional × not possible

OPTIC




BODY CLOSURE



Codes: TN6000M4W90/ND/P

TOP	6000	M	4	CW	/ND	/P
Luminaire type	Light output (lm)	Body lenght: XS = 281 mm S = 560 mm M = 1120 mm L = 1400 mm	Color temperature: 2 = 2700 K, 3 = 3000 K, 4 = 4000 K, 5 = 5700 K, 6 = 6500 K	Optic: W90 – wide 90° N60 – narrow 60° DA25 – double asymmetric	Driver type: ND - non-dimmable DALI - dimmable DALI	Specifications P - continuous wiring

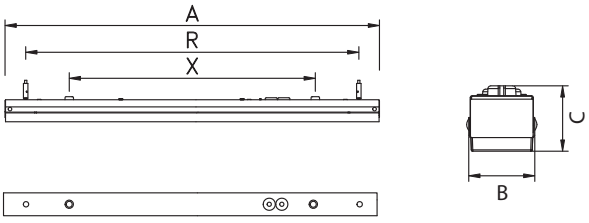

	W	lm			A	B	C	X	R	kg
		N60	W90	DA25						
TN1000 XS	9	1 300	1 350	1 300	281	40	36	215	240	0,4
TN2000 S	11	1 850	1 900	1 850	560			455	500	0,6
TN3500 S	22	3 400	3 500	3 400						
TN4000 M	26	4 200	4 400	4 200	1 120			920	1 026	1,1
TN6000 M	40	6 100	6 300	6 100						
TN5000 L	34	5 400	5 600	5 400	1 400			1 200	1 306	1,5
TN8000L	53	7 800	8 100	7 800						

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.