

US AL

LED | 220 240 V 50-60 Hz | SDCM 3 | DIMM | IP 20 | IP 40 | CRI 80 | EN 62 471 RG 0 | 80 000 L80B50 | UGR <19

η_{ef} (lm/W) 120–123

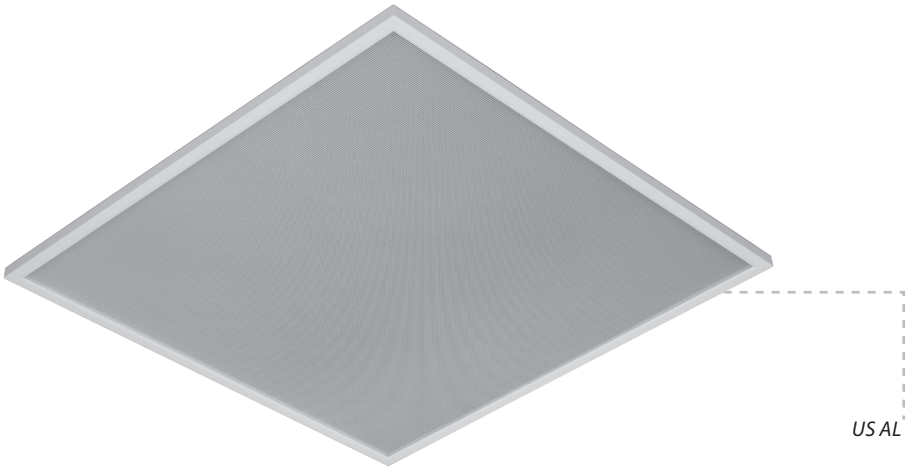

US AL



USAL

LED panel

Body:
White painted (RAL 9003) aluminium frame

Optic:
Translucent acrylic layer + Micro-prizma cover

Version (body shape)
USAL ... A, C – modul 600
USAL ... A – modul 625

Wiring:
ND - not dimmable
NDMULTI - not dimmable with switchable power
DALI - dimmable

Installation way:
- insulation class II, for recessed installation into a raster ceiling 600x600 mm or 625x625 mm. Using accessories the panels can be also installed as surface or recessed into gypsum plasterboard.

Accessories:
UQRAM - a frame for surface installation
QVESTRAM - a frame for recessed installation of USAL into gypsum plasterboard ceiling
NM – independent emergency module


	W	lm	600		625		kg
			A	B	A	B	
USAL3000A KN	27	3 300	596	596	622	622	4,0
USAL4000A KN	39	4 700					
USAL4000A MULTI KN	31 - 39	3 800 - 4 700					
USAL4000C KN	39	4 700	1196	296	x	x	4,2
USAL4000C MULTI KN	31 - 39	3 800 - 4 700					
USAL6000C KN	57	6 250					

lm - luminaire light output

2200	2700	3000	4000	5700	6500	MIX	RGB	
✕	○	○	○	○	○	✕	✕	✕
ON OFF	1-10V	DALI				INT	EXT	
●	○	○	○	○	○	✕	○	○

● default ○ optional ✕ not possible

MICROPRISMA COVER



THE BACK FRAME OF THE LAMP



DRIVER CONNECTOR

