
ЮНИА-Т ЕООД
www.juniabg.com, e-mail: sales@juniabg.com
2050 Ихтиман, България, тел. +359 886090968

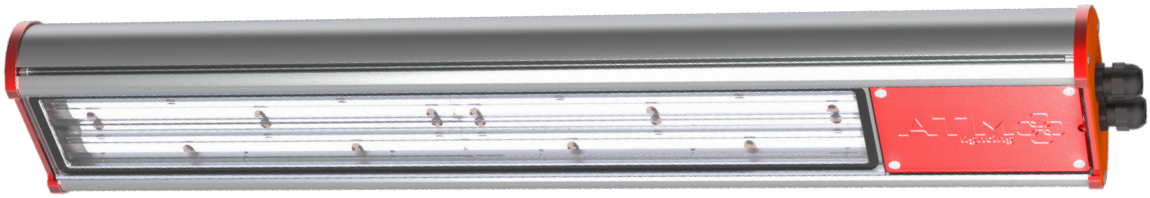

-40°C | +55°C | ATEX | ZONE 1,21 & 2,22 | IP67 | IP66 | CENTRAL BATTERY | CONTROL SYSTEM DALI

EX MARKING: II 2G Ex eb mb op is IIC T5 Gb
II 2D Ex tb op is IIIC T85°C Db

CERTIFICATES: JSHP 22 ATEX 0022X

Power supply 220-240V, 0/50-60Hz (35E)

TYPE OF THE FIXTURE	LUMINOUS FLUX [lm]	POWER CONSUMPTION [W]	EFFICIENCY [lm/W]	AMBIENT TEMPERATURE [°C]
EXF400LED-0600-FB1-1	2022	15,7	129	- 40 ÷ + 55°C
EXF400LED-0600-FB1-2	2427	18,5	131	- 40 ÷ + 55°C
EXF400LED-0600-FB1-3	2831	21,3	133	- 40 ÷ + 55°C
EXF400LED-0600-FB2-1	3827	29,5	130	- 40 ÷ + 55°C
EXF400LED-0600-FB2-2	4593	34,9	132	- 40 ÷ + 55°C
EXF400LED-0600-FB2-3	5358	40,5	132	- 40 ÷ + 55°C
EXF400LED-1200-FB2-1	4036	29,7	136	- 40 ÷ + 55°C
EXF400LED-1200-FB2-2	4844	35,1	138	- 40 ÷ + 55°C
EXF400LED-1200-FB2-3	5651	40,7	139	- 40 ÷ + 55°C
EXF400LED-1200-FB4-1	7625	57,5	133	- 40 ÷ + 55°C
EXF400LED-1200-FB4-2	9150	68,0	135	- 40 ÷ + 55°C
EXF400LED-1200-FB4-3	10675	79,7	134	- 40 ÷ + 55°C

Power supply 110-254V, 50-60Hz; 220-250V 0Hz (25E)

TYPE OF THE FIXTURE	LUMINOUS FLUX [lm]	POWER CONSUMPTION [W]	EFFICIENCY [lm/W]	AMBIENT TEMPERATURE [°C]
EXF400LED-0600-FB1	2993	25,0	120	- 40 ÷ + 55°C
EXF400LED-0600-FB2	5664	45,0	126	- 40 ÷ + 55°C
EXF400LED-1200-FB2	5974	45,0	133	- 40 ÷ + 55°C
EXF400LED-1200-FB4	11285	89,9	126	- 40 ÷ + 55°C

CROSS-WIRING SECTION

TYPE	L	L1	L2	H	B	weight [kg]
EXF400LED-0600	829	755	795	75	145	~ 5,2
EXF400LED-1200	1389	1315	1355	75	145	~ 8,0

gross weight of standard versions

