


ЮНИА-Т ЕООД
www.juniabg.com, e-mail: sales@juniabg.com
2050 Ихтиман, България, тел. +359 886090968

LF-EVC50 LF-EVC100 LF-EVC200 LF-EVC300
lega di alluminio
aluminum alloy

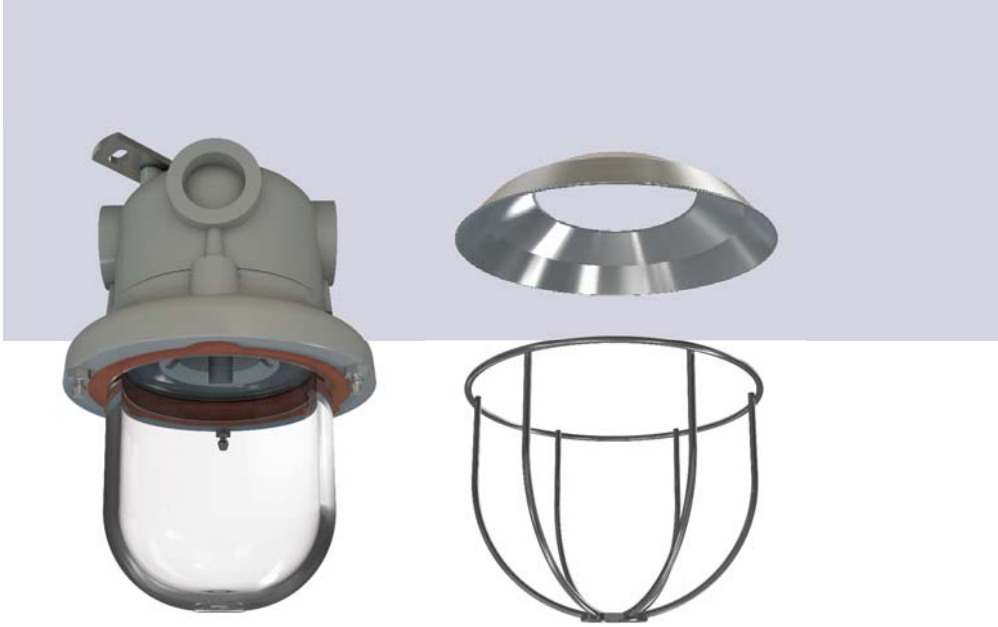

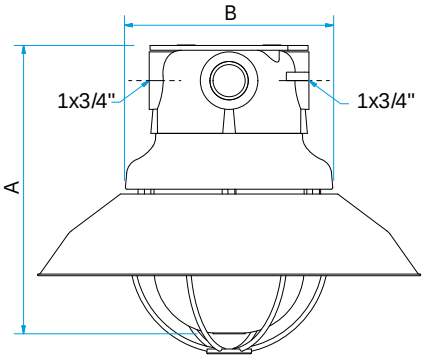

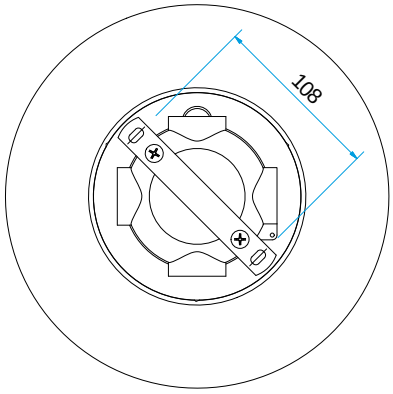

QUOTE IN MM // *DIMENSIONS IN MILLIMETERS*

articoli//*items*

ITEM CODE	DIMENSION A MM	DIMENSION B MM	WEIGHT KG	LAMP HOLDER	LAMPS			
					LAMP TYPE	WATT W	CLASS TA: +40°C	MAX SURFACE TEMPERATURE
					FL*	20	T4	T 135°C
					HAL	100	T3	T 200°C
					LED*	9	T6	T 85°C
LF-EVC-50-AL	185	135	1,35	E27	LED*	17	T5	T 100°C
					FL	20	T6	T 85°C
					HAL	150	T3	T 200°C
LF-EVC-100-AL**	365	152	2,85	E27	LED	9	T6	T 85°C
					FL	23	T6	T 85°C
					HAL	200	T3	T 200°C
LF-EVC-200-AL**	405	178	3,72	E27	BL	160	T3	T 200°C
					FL	85	T3	T 200°C
LF-EVC-300-AL**	485	197	5,30	E40	BL	250	T3	T 200°C

Key:

* special TA +60°C // ** supplied with junction box and sealing nipple

FL = fluorescent // HAL = halogen // LED = with Led // BL = blended light

LF-EVC50 LF-EVC100
LF-EVC200 LF-EVC300
lega di alluminio
aluminum alloy

accessori su richiesta//*accessories on request*

> Differenti colori // *Different housing colors available*
> Riflettore esterno alluminio anodizzato // *External reflector anodized aluminum*
> Gabbia di protezione inox AISI 316L elettrolucidato // *ST. ST. 316L electro-polished cage*
> Pressacavo // *Cable gland*
> Lampada a Led, alogena, fluorescente // *Led lamp, halogen lamp, fluorescent lamp*

certificazioni//*certification data*

CLASSIFICATION	GROUP II	CATEGORY 2GD
INSTALLATIONS	ZONE 1 – ZONE 2 (GAS)	ZONE 21 – ZONE 22 (DUST)
MARKING	CE Ex II 2GD Ex d IIC T3/T6 Gb Ex tb IIIC T 200°C/85°C Db IP65/IP66	
CERTIFICATION	ATEX INERIS 01 ATEX 0072X	
STANDARDS	EN 60079-0 IEC 60079-0 EN 60079-1 IEC 60079-1 EN 60079-31 IEC 60079-31 AND EUROPEAN DIRECTIVE 34/14/UE : 2014	
CLASS TEMPERATURE	SEE SELECTION CHART	
AMBIENT TEMPERATURE	STANDARD -20°C +40°C	SPECIAL -20°C +60°C LF-EVC50 WITH LED LAMP, FLUORESCENT LAMP
DEGREE OF PROTECTION	IP65/IP66 (LF-EVC50)	

caratteristiche meccaniche//*mechanical features*

BODY AND COVER	LOW COOPER CONTENT ALUMINUM ALLOY
GLOBE	SHOCK AND TEMPERATURE RESISTANT BOROSILICATE GLASS
GASKET	SILICONE ACID/HYDROCARBON RESISTANT
BOLT AND SCREWS	ST. ST. A2
MOUNTING	CEILING WITH BRACKET
ENTRY	DIRECT 3/4”
ENTRIES	3/4” 7/1 – NPT – M25 X 1.5 THREADED
HOUSING FINISH	EPOXY COATING STANDARD RAL 7000 (GREY) OR RAL 3000 (RED) ON REQUEST

caratteristiche elettriche//*electrical features*

POWER SUPPLY	12-24-48-110-230V
FREQUENCY	50/60 Hz
LAMP HOLDER	E27 OR E40 CERAMIC (LF-EVC300)