
Segnalatori acustici **AW-ETH12MD**
AW-ETH12MD *audible warning devices*





AW-ETH12MD I segnalatori acustici AW-ETH12MD, sono utilizzati in ambienti a basso rumore di fondo, ove sia presente una potenziale atmosfera esplosiva.
Sono dotati di circuito a 32 toni selezionabili mediante deep-switch.
Il trasduttore acustico ha una impedenza di 8Ω e una frequenza di 2KHz. Il diffusore è in ABS cromato antistatico. La versione standard è in lega di alluminio a basso tenore di rame.
La staffa di supporto è AISI 316L.
A richiesta AW-ETH12MD:
Ghisa EN-GJL-200
AISI 316L

AW-ETH12MD The AW-ETH12MD series of audible warning devices are for use in low background noise environments, where there is a potential explosive atmosphere.
They are equipped with an electronic circuit with 32 selectable tones by a deep-switch. The acoustic trasducer has impendance of 8 Ω and frequency of 2KHz.
The speaker horn is in anti-static high impact chrome ABS. Standard version is marine grade copper free LM6 aluminum. The mounting bracket is in St.St. 316L.
AW-ETH12MD on request:
Cast iron EN-GJL-200
Stainless Steel 316L

AW-ETH12MD
lega di alluminio
aluminum alloy

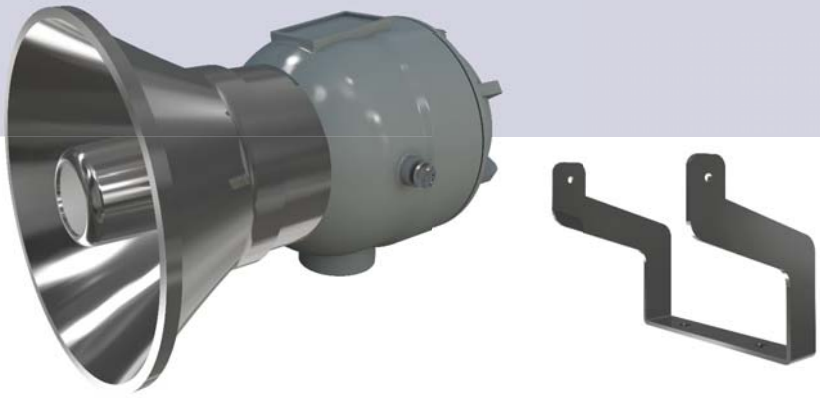

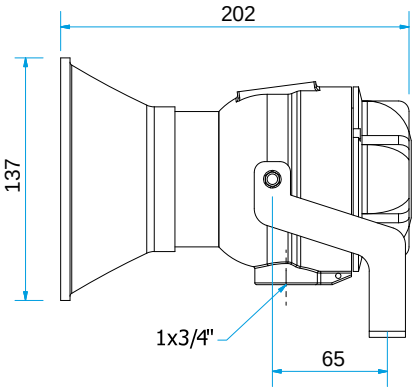

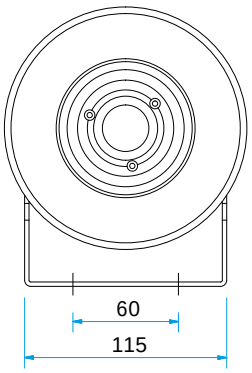

QUOTE IN MM // *DIMENSIONS IN MILLIMETERS*

articoli//*items*

ITEM CODE	POWER SUPPLY V	WORKING CURRENT A	FREQUENCY Hz	POWER CONSUMPTION W	ACOUSTIC FREQUENCY Hz	SOUND OUTPUT dB@1m	WEIGHT KG
AW-ETH12MD-01-AL-15-T	12/24V AC DC	0,10-0,12	50/60	7	340/2000	109	1,25
AW-ETH12MD-01-AL-30-T	48V AC	0,06	50/60	7	340/2000	107	1,4
AW-ETH12MD-01-AL-31-T	48V DC	0,06	--	7	340/2000	107	1,25
AW-ETH12MD-01-AL-50-T	110V AC	0,02	50/60	7	340/2000	109	1,4
AW-ETH12MD-01-AL-51-T	110V DC	0,02	--	7	340/2000	109	1,4
AW-ETH12MD-01-AL-60-T	230V AC	0,012	50/60	7	340/2000	109	1,4

accessori su richiesta//*accessories on request*

> Differenti colori // *Different housing colors available*
> Staffa di supporto AISI 316L // *ST. ST. 316L mounting bracket*
> Pressacavo // *Cable gland*

AW-ETH12MD
lega di alluminio
aluminum alloy

certificazioni//*certification data*

CLASSIFICATION	GROUP II	CATEGORY 2GD
INSTALLATIONS	ZONE 1 – ZONE 2 (GAS)	ZONE 21 – ZONE 22 (DUST)
MARKING	CE Ex II 2 GD Ex d IIC T6 Gb	Ex tb IIIC T85°C Db IP65
CERTIFICATION	ATEX INERIS 02 ATEX 0074	
STANDARDS	EN 60079-0 IEC 60079-0 EN 60079-1 IEC 60079-1 EN 60079-31 IEC 60079-31 AND EUROPEAN DIRECTIVE 34/14/UE : 2014	
CLASS TEMPERATURE	85°C (T6)	
AMBIENT TEMPERATURE	-20°C +55°C	
DEGREE OF PROTECTION	IP65	

caratteristiche meccaniche//*mechanical features*

BODY AND COVER	LOW COOPER CONTENT ALUMINUM ALLOY
SAFETY WIRE	ST. ST. 316L
SPEAKER HORN	CHROME ABS
GASKET	SILICONE ACID/HYDROCARBON RESISTANT
BOLT AND SCREWS	ST. ST. A2
ENTRY	DIRECT 3/4"
ENTRIES	3/4" 7/1 – NPT – M25 X 1.5 THREADED
HOUSING FINISH	EPOXY COATING STANDARD RAL 7000 (GREY) OR RAL 3000 (RED) ON REQUEST

caratteristiche elettriche//*electrical features*

POWER SUPPLY	12/24-48-110-230V
SOUND OUTPUT	109 dB (THE VALUE IS MEASURED ON THE HIGHEST TONE)
FREQUENCY	50/60 Hz
DRIVER IMPEDANCE	8 Ω
SERVICE	CONTINUOUS

AW-ETH12MD 32toni//*32tones*

TONO // *TONE*	DEEP SWITCH • ON - 0 OFF 1	2	3	4	5	DESCRIZIONE // *DESCRIPTION*
1	0	0	0	0	0	554HZ 0.1S - 440HZ 0.4S (AFNOR NF32001) ALLARME EVACUAZIONE (FRANCIA) // *554HZ 0.1S - 440HZ 0.4S (AFNOR NF32001) EVACUATION ALARM (FRANCE)*
2	•	0	0	0	0	650HZ - 1600HZ YELP RAMPA SALITA E DISCESA VELOCE // *650HZ - 1600HZ YELP ALTERNATE FAST TWO-TONE*
3	0	•	0	0	0	650HZ - 1600HZ WAIL RAMPA SALITA E DISCESA LENTA // *650HZ - 1600HZ WAIL ALTERNATE SLOW TWO-TONE*
4	•	•	0	0	0	554HZ 1S ON - 1S OFF INTERMITTENTE // *554HZ/ 1S ON -1S OFF INTERMITTENT TONE*
5	0	0	•	0	0	554HZ CONTINUO // *554HZ CONTINUOUS NOTE*
**6	•	0	•	0	0	1000HZ CONTINUO - GAS TOSSICO // *1000HZ CONTINUOUS NOTE - TOXIC GAS*
**7	0	•	•	0	0	1000HZ INTERMITTENTE 1S ON - 1S OFF ALLARME GENERALE // *1000HZ INTERRUPTED TONE 1S ON - 1S OFF GENERAL ALARM*
8	•	•	•	0	0	800HZ - 1000HZ/0.25S ALTERNATO (ISO 8201 ALLARME EVACUAZIONE) // *800HZ - 1000HZ/0.25S INTERMITTENT (ISO 8201 INTERNATIONAL EVACUATION ALARM)*
**9	0	0	0	•	0	1200 - 500HZ 1SEC SWEEP ALTERNATO ALLARME EVACUAZIONE (GERMANIA) (PAPA) // *1200 - 500HZ 1SEC REVERSE SWEEP EVACUATION ALARM (GERMANY) (PAPA)*
10	•	0	0	•	0	500 - 1200HZ, 3.5S/0.5S OFF (NEN 2575:2000) SLOW WHOOP (OLANDA) // *500 - 1200HZ, 3.5S/0.5S OFF (NEN 2575:2000) DUTCH SLOW WHOOP*
11	0	•	0	•	0	800 - 1000HZ/0.5S ALTERNATO - ALLARME FUOCO // *800 - 1000HZ/0.5S ALTERNATE TWO TONE - FIRE ALARM*
12	•	•	0	•	0	1000 - 2000HZ ALLARME (SINGAPORE) // *1000 - 2000HZ/0.5S ALTERNATING - ALARM (SINGAPORE)*
13	0	0	•	•	0	1000HZ/1S ON - 1S OFF 7 VOLTE - POI ON PER 7S - OFF PER 1S - EMERGENZA ALLARME // *1000HZ/1S ON - 1S OFF 7 TIMES - THEN ON FOR 7S - OFF FOR 1S - EMERGENCY ALARM*
14	•	0	•	•	0	422HZ A SALIRE 775HZ/0.85S (3X) - 1S OFF - RIPETE (NFPA WHOOP) // *422HZ TO 775HZ/0.85S (3X) - 1S OFF - REPEAT (NFPA WHOOP)*
15	0	•	•	•	0	970HZ/1S OFF - 1S ON INTERMITTENTE (APOLLO FIRE SYSTEM ALLERTA) // *970HZ/1S OFF - 1S ON PULSED (APOLLO FIRE SYSTEM ALERT TONE)*
16	•	•	•	•	0	970HZ/0.5S - 630HZ/0.5S ALTERNATO (APOLLO FIRE SYSTEM EVACUAZIONE) // *970HZ/0.5S - 630HZ/0.5S ALTERNATING (APOLLO FIRE SYSTEM EVACUATION TONE)*
17	0	0	0	0	•	500 - 1200HZ/3,75S - 0,5S OFF TRILLO INTERMITTENTE (INCENDIO GERMANIA) // *500 - 1200HZ/3,75S - 0.5S OFF SWEEPING (FIRE ALARM GERMANY)*
18	•	0	0	0	•	420HZ/0.625S ON - 0.625S OFF INTERMITTENTE (ALLARME ALLERTA AUSTRALIA) // *420HZ/0.625S ON - 0.625S OFF (AUSTRALIA AS 1670 ALERT TONE)*
19	0	•	0	0	•	500HZ- 1200HZ/3.75S - 0.25S OFF (ALLARME EVACUAZIONE AUSTRALIA) // *500HZ- 1200HZ/3.75S - 0.25S OFF (AUSTRALIA AS 1670 EVACUATION TONE)*
20	•	•	0	0	•	340HZ CONTINUO NOTA FISSA // *340HZ CONTINUOUS NOTE*
21	0	0	•	0	•	400HZ CONTINUO NOTA FISSA // *400HZ CONTINUOUS NOTE*
22	•	0	•	0	•	660HZ CONTINUO NOTA FISSA // *660HZ CONTINUOUS NOTE*
23	0	•	•	0	•	750HZ CONTINUO NOTA FISSA // *750HZ CONTINUOUS NOTE*
24	•	•	•	0	•	840HZ CONTINUO NOTA FISSA // *840HZ CONTINUOUS NOTE*
25	0	0	0	•	•	1200HZ CONTINUO NOTA FISSA // *1200HZ CONTINUOUS NOTE*
26	•	0	0	•	•	1480HZ CONTINUO NOTA FISSA // *1480HZ CONTINUOUS NOTE*
27	0	•	0	•	•	770HZ/1S - 1S OFF INTERMITTENTE // *770HZ/1S - 1S OFF INTERMITTENT TONE*
28	•	•	0	•	•	550HZ/0.33S - 1000HZ/0.7S // *550HZ/0.33S - 1000HZ/0.7S*
29	0	0	•	•	•	BADENIA // *SIMULATED BELL*
30	•	0	•	•	•	970HZ/0.5S ON - 0.5S OFF (3X) SEGUITO DA 1.5S SILENZIO - RIPETE (ISO 8201) // *970HZ/0.5S ON - 0.5S OFF (3X) FOLLOWED 1.5S SILENCE THEN REPEAT (ISO 8201)*
31	0	•	•	•	•	440HZ CONTINUO NOTA FISSA // *440HZ CONTINUOUS NOTE*
32	•	•	•	•	•	700HZ CONTINUO NOTA FISSA // *700HZ CONTINUOUS NOTE*

**ALLARMI SONORI PER INSTALLAZIONI OFFSHORE (PFEER) RACCOMANDATI DA UKOOA // ***THE PFEER SOUND SIGNALS RECOMMENDED BY UKOOA ARE:*

ALLARME GENERALE // *GENERAL ALARM*	SEGNALE SONORO 7 // *SIGNAL 7*	TONO INTERMITTENTE 1000HZ // *INTERRUPTED TONE 1000HZ*
PAPA // *PAPA*	SEGNALE SONORO 9 // *SIGNAL 9*	SWEEP ALTERNATO 1200-500HZ // *REVERSE SWEEP 1200-500HZ*
GAS TOSSICO // *TOXIC GAS*	SEGNALE SONORO 6 // *SIGNAL 6*	TONO CONTINUO 1000HZ // *CONTINUOUS TONE 1000HZ*