



Recessed polycarbonate downlights with decorative glass

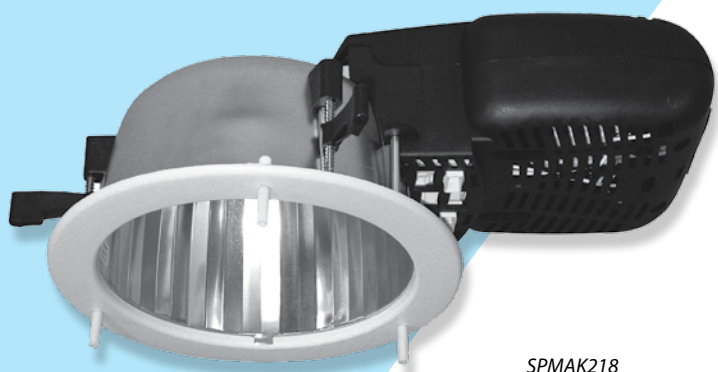

SPMAK218

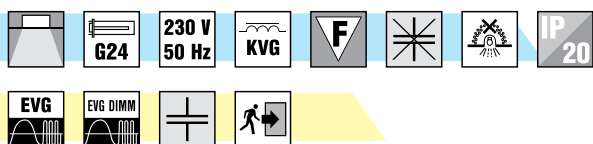

Body:
Plastic gear box. Plastic white decorative ring.


Optic:
Metalized polycarbonate reflector

Application:
Recessed fullplastic downlight for installation into false ceiling.

Accessories:
533401 Clear glass, Ø 260 mm
533402 Opal glass, Ø 260 mm
533403 Clear glass ring, Ø 260/160 mm
533404 Opal glass ring, Ø 260/160 mm
Glass cover with colour accessories, Ø 260 mm – see overview below

Versions:
NZ emergency pack (only for fittings with electronic ballast)

Note:
SPMAK body and wiring are the same like SPMA downlights.
Decorative glass can be installed to the SPMA fitting, which is modified for this (reflektor and plastic ring). This modification is signed „K“ in code of fitting. Decorative glass has to be ordered by its code separately (e.g. SPMAK218EPPB + 533401).

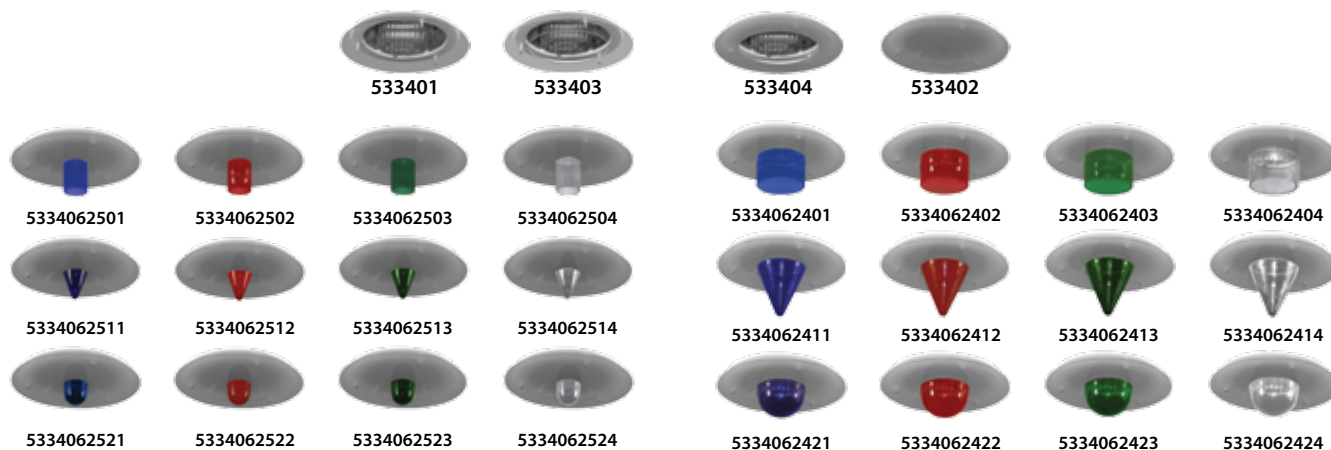

	W	□	kg
SPMAK113 #@	1x13	200	0,99
SPMAK118 #@	1x18	200	0,99
SPMAK126 #@	1x26	200	1,22
SPMAK132 #@	1x18	200	0,78
SPMAK142 #@	1x36	200	0,78
SPMAK213 #@	2x13	200	1,34
SPMAK218 #@	2x18	200	1,34
SPMAK226#@	2x26	200	1,79

