
ЮНИА-Т ЕООД
www.juniabg.com, e-mail: sales@juniabg.com
2050 Ихтиман, България, тел. +359 886090968

CONCEPT BLUE

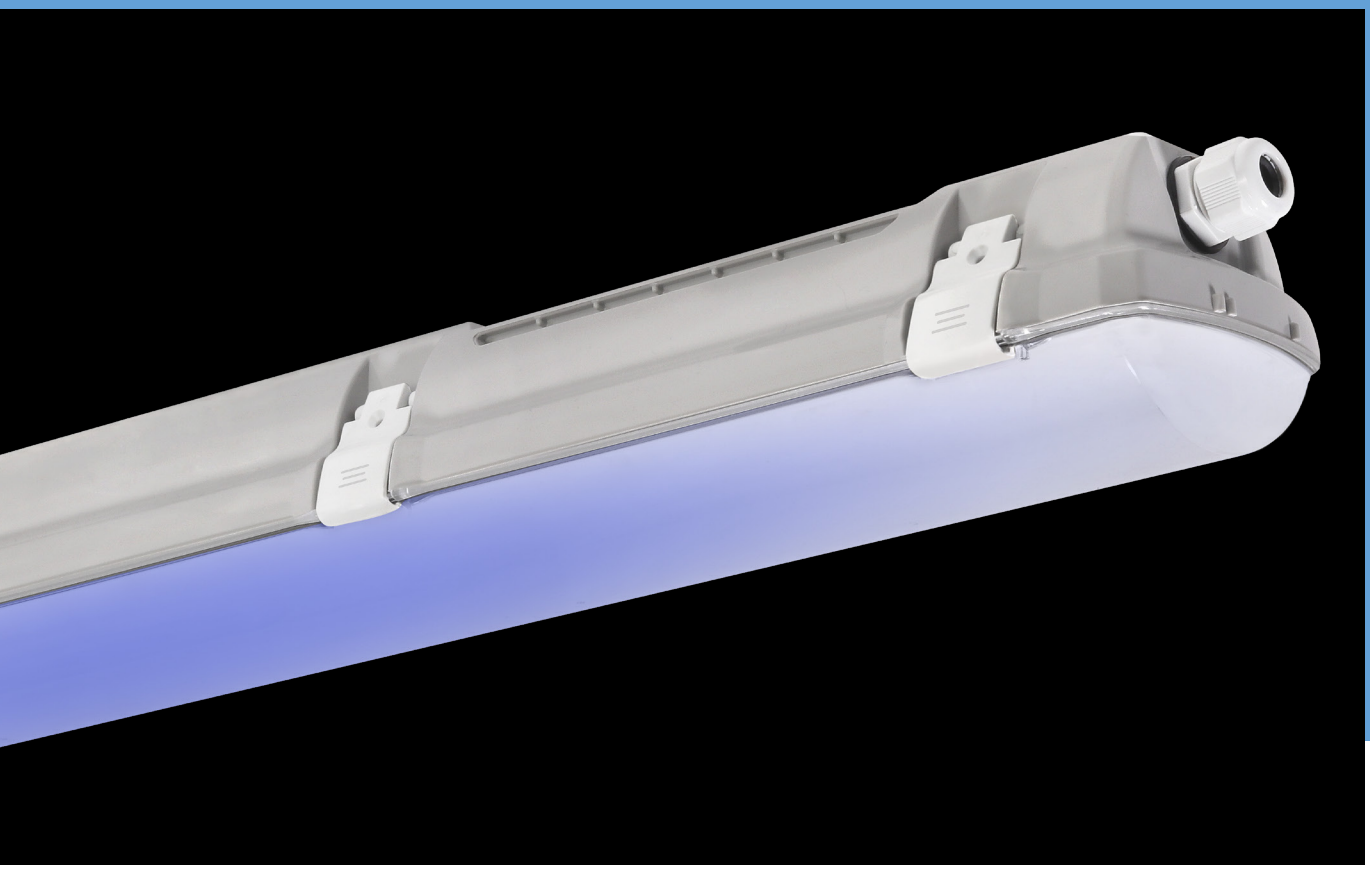

... for poultry farms, chemically resistant.

USE


Light fixtures fitted with our special blue light producing LED module are primarily designed **to be used in poultry farms.** The benefit of this specific colour is it calms the poultry and suppresses aggressive its behavior.

Our PRIMA, INNOVA, and FUTURA-range luminaires may be fitted with this module.


The light fixtures withstand exposure to chemically aggressive environments (ammonia in the air) typical of livestock farms.


The body made of ABS and the diffuser made of AC have increased chemical resistance. In addition to being protected against dust and humidity (IP66), the fixtures boast excellent thermal resistance, withstanding temperatures up to 50 °C.

IP69-rated, our PRIMA and INNOVA-range fittings may be washed using hot water (up to 80 °C).

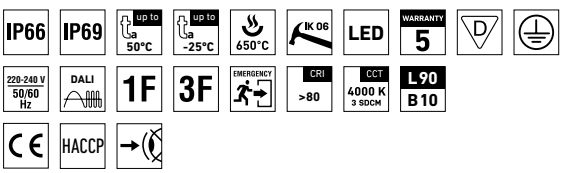


PRIMA ABS BLUE







PRIMA 1.5ft ABS BLUE




Code	Type	Max. ambient temperature [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting [lm]	Power consumption [W]	System efficacy [lm/W]	Net weight [kg]	A [mm]	D [mm]
	EXAMPLE								
107004	PRIMA 1.4ft ABS 6400/840 BLUE	45	6500 / 640	6050 / 560	38,5 / 16	157 / 35	1,7	1175	700 - 960
107005	PRIMA 1.5ft ABS 8000/840 BLUE	45	8020 / 640	7460 / 560	47,4 / 16	157 / 35	2,0	1455	970 - 1230

INNOVA ABS BLUE

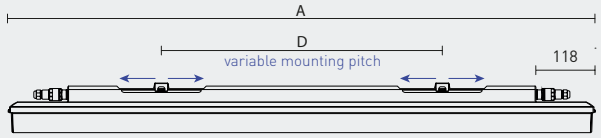





INNOVA 1.5ft ABS BLUE




Code	Type	Max. ambient temperature [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting [lm]	Power consumption [W]	System efficacy [lm/W]	Net weight [kg]	A [mm]	D [mm]
	EXAMPLE								
107010	INNOVA 1.4ft ABS 6400/840 BLUE	45	6500 / 640	6050 / 560	38,5 / 16	157 / 35	1,5	1175	420 - 700
107011	INNOVA 1.5ft ABS 8000/840 BLUE	45	8020 / 640	7460 / 560	47,4 / 16	157 / 35	1,8	1455	700 - 980

FUTURA ABS BLUE





FUTURA 2.5ft ABS BLUE



Code	Type	Max. ambient temperature [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting [lm]	Power consumption [W]	System efficacy [lm/W]	Net weight [kg]	A [mm]	D [mm]
	EXAMPLE								
107016	FUTURA 2.4ft ABS 8800/840 BLUE	45	8980 / 640	7900 / 560	52,8 / 16	150 / 35	2,45	1172	700
107017	FUTURA 2.5ft ABS 11000/840 BLUE	45	11260 / 640	9910 / 560	64,7 / 16	153 / 35	2,95	1452	940

LIGHT FITTING DETAILED VIEW

CONCEPT BLUE

